


Base Swivel Caster
Number In Chart
For rigid models change "S"
to "R" at end of base
caster number.




POLYURETHANE MODELS

CG-MAX EFFICIENCY WHEEL™ Orange Round Polyurethane on Aluminum

AN		4	2	800	5 5/8	1 11/16	5	16AN04228S
		5	2	1000	6 1/2	1 5/8	6	16AN05228S
		6	2	1250	7 1/4	1 3/4	7	16AN06228S
		8	2	1250	9 1/2	1 3/4	9	16AN08228S


85 Shore A
Learn more below
Standard Bearing: Precision Ball (28)
with new patent pending top hats.

CG-MAX EFFICIENCY WHEEL™ Maroon Round Polyurethane on Aluminum

AX		4	2	800	5 5/8	1 11/16	5	16AX04228S
		5	2	1000	6 1/2	1 5/8	6	16AX05228S
		6	2	1250	7 1/4	1 3/4	7	16AX06228S
		8	2	1250	9 1/2	1 3/4	9	16AX08228S


85 Shore A
Learn more below
Standard Bearing: Precision Ball (28)
with new patent pending top hats.

Green Round Tread Polyurethane on Aluminum

PM		5	2	1000	6 1/2	1 5/8	6	16PM05228S
		6	2	1250	7 1/4	1 3/4	7	16PM06228S
		8	2	1250	9 1/2	1 3/4	9	16PM08228S


95 Shore A
Standard Bearing: Precision Ball (28).

Butterscotch Round Tread Polyurethane on Aluminum

PM 80A		5	2	1000	6 1/2	1 5/8	6	16PM05228S80A
		6	2	1250	7 1/4	1 3/4	7	16PM06228S80A
		8	2	1250	9 1/2	1 3/4	9	16PM08228S80A


80 Shore A
Standard Bearing: Precision Ball (28).
To Specify Rigid or Swivel, insert "R" or "S" before "80A".

Green Polyurethane Crowned Tread on Aluminum

PD		4	2	700	5 5/8	1 11/16	5	16PD04201S
		5	2	1050	6 1/2	1 5/8	5 1/4	16PD05201S
		6	2	1230	7 1/4	1 3/4	5 3/4	16PD06201S
		8	2	1250	9 1/2	1 3/4	7	16PD08201S


Standard Bearing: Roller (01).

Economical Green Polyurethane on Iron

PI		4	2	700	5 5/8	1 11/16	7	16PI04202S
		5	2	1000	6 1/2	1 5/8	8	16PI05202S
		6	2	1200	7 1/4	1 3/4	9 3/4	16PI06202S
		8	2	1250	9 1/2	1 3/4	10	16PI08202S


Standard Bearing: Drawn Cup Roller (02)

Polyurethane on Polypropylene

XA		4	2	600	5 5/8	1 11/16	4 1/4	16XA04201S
		5	2	750	6 1/2	1 5/8	4 3/4	16XA05201S
		6	2	900	7 1/4	1 3/4	5 1/2	16XA06201S
		8	2	1000	9 1/2	1 3/4	7 1/2	16XA08201S


Standard Bearing: Roller (01)

Eagle Polyurethane on Polypropylene

EG		4	2	600	5 5/8	1 11/16	5 3/4	16EG04201S
		5	2	900	6 1/2	1 5/8	5 1/2	16EG05201S
		6	2	1100	7 1/4	1 3/4	8	16EG06201S
		8	2	1200	9 1/2	1 3/4	10 1/4	16EG08201S


Standard Bearing: Roller (01).

Faultless K Solid Polyurethane

KW		4	2	700	5 5/8	1 11/16	5	16KW04201S
		5	2	1000	6 1/2	1 5/8	5 1/2	16KW05201S
		6	2	1200	7 1/4	1 3/4	6 1/4	16KW06201S
		8	2	1250	9 1/2	1 3/4	8	16KW08201S


Standard Bearing: Roller (01).

V-Grooved Solid Polyurethane

XV		4	2	300	5 5/8	1 11/16	4 1/2	16XV04202S
		5	2	300	6 1/2	1 5/8	5	16XV05202S
		6	2	300	7 1/4	1 3/4	5 1/4	16XV06202S
		8	2	300	9 1/2	1 3/4	5 3/4	16XV08202S


Standard Bearing: Drawn Cup Roller (02).
Optional Bearings: Delrin (52) Change 02 above to 52.

Base Swivel Caster
Number In Chart
For rigid models change "S"
to "R" at end of base
caster number.

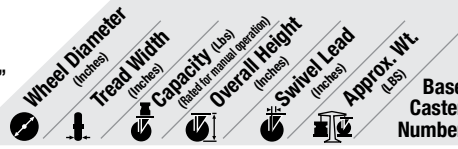


NYLON MODELS

Maxim® Glass Filled Nylon

NG		3 1/4	2	700	4 1/4	1 3/4	5	16NG03201S
		4	2	800	5 5/8	1 11/16	5	16NG04201S
		5	2	1000	6 1/2	1 5/8	5 1/2	16NG05201S
		6	2	1200	7 1/4	1 3/4	6 1/4	16NG06201S
8	2	1250	9 1/2	1 3/4	8	16NG08201S		


Standard Bearing: Roller (01).
Optional bearings: Drawn Cup Roller (02), Bronze (22), Pedestal Precision (29) and Delrin (51); change 01 above to optional bearing code.

Heavy Duty Glass Filled Nylon

DT		4	2	800	5 5/8	1 11/16		16DT04201S
		5	2	1200	6 1/2	1 5/8		16DT05201S
		6	2	1250	7 1/4	1 3/4		16DT06201S
		8	2	1250	9 1/2	1 3/4		16DT08201S

Standard Bearing: Roller (01).


High Temp Glass Filled Nylon

HT		4	2	800	5 5/8	1 11/16		16HT04201S
		5	2	1000	6 1/2	1 5/8		16HT05201S
		6	2	1200	7 1/4	1 3/4		16HT06201S
		8	2	1250	9 1/2	1 3/4		16HT08201S

Standard Bearing: Roller (01).


METAL MODELS

Cast Iron

CA		3 1/4	2	700	4 1/4	1 3/4	6 3/4	16CA03201S
		4	2	1000	5 5/8	1 11/16	7	16CA04201S
		5	2	1250	6 1/2	1 5/8	8	16CA05201S
		6	2	1250	7 1/4	1 3/4	9 3/4	16CA06201S
8	2	1250	9 1/2	1 3/4	12 1/2	16CA08201S		

Standard Bearing: Roller (01).

V-Grooved Cast Iron

VG		4	2	800	5 5/8	1 11/16	7	16VG04201S
		5	2	800	6 1/2	1 5/8	8 3/4	16VG05201S
		6	2	1000	7 1/4	1 3/4	9 3/4	16VG06201S

Standard Bearing: Roller (01).



- Our most advanced polyurethane wheel
- ANSI:ICWM tested to outlast and outperform the competition
- Best-in-class ergonomics increase user safety and reduce fatigue
- Patent pending self-retaining top hats reduce environmental and assembly waste
- Debris resistant



Visit albiocasters.com/CG-MAX for additional information and CAD models.