


Base Swivel Caster
Number In Chart
For rigid models change "S"
to "R" at end of base
caster number.



POLYURETHANE MODELS

CG-MAX EFFICIENCY WHEEL™ Orange Round Polyurethane on Aluminum

AN	6	2	1250	8 ¹ / ₄	1 ³ / ₄	10	68AN06228S
	8	2	1500	10 ¹ / ₄	2 ⁵ / ₁₆	14	68AN08228S

85 Shore A
Learn more on previous page

Standard Bearing: Precision Ball (28)
with new patent pending top hats.

CG-MAX EFFICIENCY WHEEL™ Maroon Round Polyurethane on Aluminum

AX	6	2	1250	8 ¹ / ₄	1 ³ / ₄	10	68AX06228S
	8	2	1500	10 ¹ / ₄	2 ⁵ / ₁₆	14	68AX08228S

85 Shore A
Learn more on previous page

Standard Bearing: Precision Ball (28)
with new patent pending top hats.

Green Round Tread Polyurethane on Aluminum

PM	6	2	1250	8 ¹ / ₄	1 ³ / ₄	10	68PM06228S
	8	2	1500	10 ¹ / ₄	2 ⁵ / ₁₆	14	68PM08228S

Standard Bearing: Precision Ball (28).

Butterscotch Round Tread Polyurethane on Aluminum

PM 80A	6	2	1250	8 ¹ / ₄	1 ³ / ₄	10	68PM06228S80A
	8	2	1500	10 ¹ / ₄	2 ⁵ / ₁₆	14	68PM08228S80A

Standard Bearing: Precision Ball (28)
with new patent pending top hats.

To Specify Rigid or Swivel, insert "R" or "S" before "80A".

Aubin Industries Swivel-EAZ® Dual Round Tread

EY*	6	2	1425	8 ¹ / ₄	1 ³ / ₄	10	68EY06228S
	8	2	2000	10 ¹ / ₄	2 ⁵ / ₁₆	14	68EY08228S

Standard Bearing: Precision Ball (28).

*Additional durometers available; consult factory.


Aubin Industries Swivel-EAZ® Dual Flat Tread

EZ*	6	2	1900	8 ¹ / ₄	1 ³ / ₄	10	68EZ06228S
	8	2	2000	10 ¹ / ₄	2 ⁵ / ₁₆	14	68EZ08228S

Standard Bearing: Precision Ball (28).

*Additional durometers available; consult factory.

Base Swivel Caster
Number In Chart
For rigid models change "S"
to "R" at end of base
caster number.

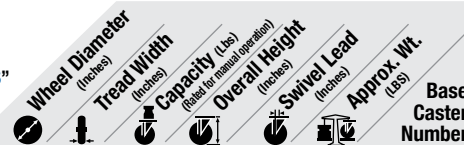

POLYURETHANE MODELS (CONTINUED)

Yellow Polyurethane Tread on Heavy Duty Iron

PF	6	2	2000	8 ¹ / ₄	1 ³ / ₄	10	68PF06228S
	8	2	2000	10 ¹ / ₄	2 ⁵ / ₁₆	14	68PF08228S

Standard Bearing: Precision Ball (28).

Solid Elastomer

SE	6	2	1100	8 ¹ / ₄	1 ³ / ₄	10	68SE06228S
	8	2	1200	10 ¹ / ₄	2 ⁵ / ₁₆	14	68SE08228S

Standard Bearing: Precision Ball (28).

NYLON MODELS

Trionix™ High Impact Polymer

NX	6	2	2000	8 ¹ / ₄	1 ³ / ₄	11	68NX06228S
	8	2	2000	10 ¹ / ₄	2 ⁵ / ₁₆	15	68NX08228S

Standard Bearing: Precision Ball (28).

Heavy Duty Glass Filled Nylon

DT	6	2	1200	8 ¹ / ₄	1 ³ / ₄	9	68DT06228S
	8	2	1400	10 ¹ / ₄	2 ⁵ / ₁₆	13	68DT08228S

Standard Bearing: Precision Ball (28).

RUBBER MODELS

Neoprene Rubber Round Tread on Aluminum

NP	6	2	700	8 ¹ / ₄	1 ³ / ₄	10	68NP06228S
	8	2	700	10 ¹ / ₄	2 ⁵ / ₁₆	14	68NP08228S

Standard Bearing: Precision Ball (28).

68 Series Wheel Selection Hints



CG-MAX PM EY EZ PF SE

Polyurethane

- Excellent multi-purpose wheels
- Non-marking, floor protective
- Excellent capacity, wear resistance, and strength
- Various durometers, thicknesses



NX DT

Nylon

- High load capacities
- Impact resistant
- Corrosion resistant
- High-temp options



NP

Rubber

- Floor protection
- Quiet mobility
- Cost effective
- Shock absorption
- Debris rejection