


+ For swivel models add "S", for rigid model add "R" to end of base caster number.

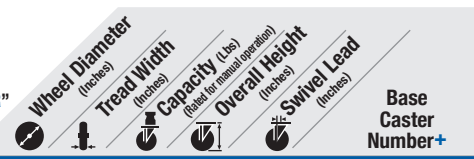

Aubin Industries Swivel-EAZ® Crown Tread (28 Prec. Ball Bearing)

EY	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	3	2137	10 ⁷ / ₈	4 ⁷ / ₈	S410EY06528
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410EY08528

Standard durometer 95 Shore A. Other durometers available.



Aubin Industries Swivel-EAZ® Flat Tread (28 Prec. Ball Bearing)

EZ	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	3	2850	10 ⁷ / ₈	4 ⁷ / ₈	S410EZ06528
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410EZ08528
	10	3	3000	14	4 ⁷ / ₈	S410EZ10528

Standard durometer 95 Shore A. Other durometers available.



Polyurethane on Heavy Duty Cast Iron (28 Precision Ball Bearing)*

PF	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	2900	10 ⁷ / ₈	4 ⁷ / ₈	S410PF06428
	8	2 ¹ / ₂	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410PF08428
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410PF08528
	10	3	3000	14	4 ⁷ / ₈	S410PF10528

95 Shore A

*Tapered Roller (09) bearings available. To order change "28" to "09". Example: S410PF10509.



Polyurethane Reactive on Iron (28 Precision Ball Bearing)*

PR	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	10	3	2400	14	4 ⁷ / ₈	S410PR10528
	12	3	2800	16	5 ¹¹ / ₁₆	S410PR12528

80 Shore A

*Tapered Roller (09) bearings available. To order change "28" to "09". Example: S410PR10509.



Vulkollan on Cast Iron (09 Tapered Roller Bearing)*

VY	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	2350	10 ⁷ / ₈	4 ⁷ / ₈	S410VY06409
	8	2 ¹ / ₂	2900	11 ⁷ / ₈	4 ⁷ / ₈	S410VY08409
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410VY08509
	10	3	3000	14	4 ⁷ / ₈	S410VY10509

*Roller (01) bearings available. To order change "09" to "01". Example: S410VY10501.



Thick Tread Vulkollan on Cast Iron (09 Tapered Roller Bearing)*

VX	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	3	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410VX06509
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410VX08509
	10	3	3000	14	4 ⁷ / ₈	S410VX10509

*Roller (01) bearings available. To order change "09" to "01". Example: S410VX10501.



X-treme Plus Solid Polyurethane (28 Precision Ball Bearing)

XP	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	8	2 ¹ / ₂	2000	11 ⁷ / ₈	4 ⁷ / ₈	S410XP08428
	8	3	2000	11 ⁷ / ₈	4 ⁷ / ₈	S410XP08528
	10	2 ¹ / ₂	2500	14	4 ⁷ / ₈	S410XP10428
	10	3	2500	14	4 ⁷ / ₈	S410XP10528




Phenolic (01 Roller Bearing)*

TM	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	1600	10 ⁷ / ₈	4 ⁷ / ₈	S410TM06401
	6	3	2000	10 ⁷ / ₈	4 ⁷ / ₈	S410TM06501
	8	2 ¹ / ₂	2000	11 ⁷ / ₈	4 ⁷ / ₈	S410TM08401
	8	3	2500	11 ⁷ / ₈	4 ⁷ / ₈	S410TM08501
	10	2 ¹ / ₂	2500	14	4 ⁷ / ₈	S410TM10401
	10	3	2900	14	4 ⁷ / ₈	S410TM10501
	12	2 ¹ / ₂	3000	16	5 ¹¹ / ₁₆	S410TM12401
	12	3	3000	16	5 ¹¹ / ₁₆	S410TM12501

*Tapered Roller (09) bearings available. To order change "01" to "09". Example: S410TM10409.



+ For swivel models add "S", for rigid model add "R" to end of base caster number.

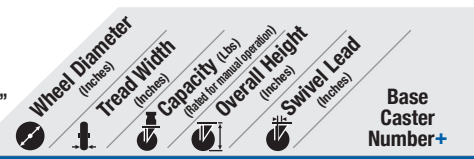

Trionix™ High Impact Polymer (28 Precision Ball Bearing)

NX	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410NX06428
	6	3	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410NX06528
	8	2 ¹ / ₂	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410NX08428
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410NX08528
	10	2 ¹ / ₂	3000	14	4 ⁷ / ₈	S410NX10428
	10	3	3000	14	4 ⁷ / ₈	S410NX10528



Cast Iron (01 Roller Bearing)*

CA	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	2300	10 ⁷ / ₈	4 ⁷ / ₈	S410CA06401
	6	3	2800	10 ⁷ / ₈	4 ⁷ / ₈	S410CA06501
	8	2 ¹ / ₂	2300	11 ⁷ / ₈	4 ⁷ / ₈	S410CA08401
	8	3	2800	11 ⁷ / ₈	4 ⁷ / ₈	S410CA08501
	10	2 ¹ / ₂	2300	14	4 ⁷ / ₈	S410CA10401
	10	3	2800	14	4 ⁷ / ₈	S410CA10501
	12	3	2800	16	5 ¹¹ / ₁₆	S410CA12501

*Tapered Roller (09) bearings available. To order change "01" to "09". Example: S410CA10409.



V-Groove Cast Iron (01 Roller Bearing)*

VG/VF	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	2500	10 ⁷ / ₈	4 ⁷ / ₈	S410VG06401
	8	2 ¹ / ₂	2500	11 ⁷ / ₈	4 ⁷ / ₈	S410VG08401
	8	3	2500	11 ⁷ / ₈	4 ⁷ / ₈	S410VG08501
	10	3	3000	14	4 ⁷ / ₈	S410VG10501

V-Groove Drop Forged Steel (01 Roller Bearing)

	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410VF08501
--	---	---	------	--------------------------------	-------------------------------	-------------

*Tapered Roller (09) bearings available. To order change "01" to "09". Example: S410VG10409.



Drop Forged Steel (01 Roller Bearing)*

FS	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410FS06401
	8	2 ¹ / ₂	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410FS08401
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410FS08501
	10	3	3000	14	4 ⁷ / ₈	S410FS10501

*Tapered Roller (09) bearings available. To order change "01" to "09". Example: S410FS10509.



Ductile Iron Crowned Tread (01 Roller Bearing)*

FR	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410FR06401
	6	3	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410FR06501
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410FR08501
	10	3	3000	14	4 ⁷ / ₈	S410FR10501

*Tapered Roller (09) bearings available. To order change "01" to "09". Example: S410FR08509.



Ductile Iron Flat Tread (01 Roller Bearing)*

FM	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410FM06401
	6	3	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410FM06501
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410FM08501
	10	3	3000	14	4 ⁷ / ₈	S410FM10501

*Tapered Roller (09) bearings available. To order change "01" to "09". Example: S410FM08509.



Ductile Iron V-Groove Tread (01 Roller Bearing)*

VM	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	6	2 ¹ / ₂	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410VM06401
	6	3	3000	10 ⁷ / ₈	4 ⁷ / ₈	S410VM06501
	8	3	3000	11 ⁷ / ₈	4 ⁷ / ₈	S410VM08501
	10	3	3000	14	4 ⁷ / ₈	S410VM10501

*Tapered Roller (09) bearings available. To order change "01" to "09". Example: S410VM08509.

