

STAINLESS STEEL CASTERS

CAPACITY RANGE 200-3000 LBS



330 Series

Kingpinless Polished Stainless Steel Casters

120 Series



Stainless Steel

Common Applications:

- Food Processing/ Manufacturing
- Food Service
- Pharmaceuticals
- Laboratory
- Clean Room
- Hospital
- Bakery Dough Troughs
- Marine

Stainless Steel Kingpin Casters



04 Series Light Duty

Capacity to 350 77



05 Series Medium Heavy Duty

Capacity to 1200 78-79

Stainless Steel Kingpinless Casters



120 Series Kingpinless

Capacity to 1200 80-81



330 Kingpinless

Capacity to 3000 84

Economy Stainless Steel Kingpin Casters



E5 Economy Series

Capacity to 900 85-86

- Why Prevenz™ Wheels?
See pages 82-83

Albion offers the leading lineup of Stainless Kingpinless casters... handling even your toughest jobs.



KINGPINLESS STAINLESS STEEL CASTERS

- Premium 304 type stainless steel plates and legs
- Premium 316 type stainless swivel section/yoke base for even greater strength and corrosion protection
- Kingpinless design is a proven workhorse for the most abusive applications
- See pages 80-84

Sometimes Even **HEAVY DUTY CASTERS** Need Protection from the Elements.

- Prevent corrosion and increase your caster life
- Maintain clean and safe operations
- Keep rolling in the toughest environments



04 SERIES
Page 77



E5 ECONOMY SERIES
Pages 85 – 86



05 SERIES
Pages 78 – 79



120 KINGPINLESS
Pages 80 – 81



330 KINGPINLESS
Page 84



NW Wheel
Economical, Strong, Clean.



PREVENZ™
The antimicrobial compound used in Prevenz™ wheels is designed to suppress the growth of a variety of destructive and odor causing microbes.

See pages 82 – 83 for more details.

Just look for this
Stainless Steel badge!



ALBION®
the caster experts

04

Light Duty Stainless Steel Casters

CAPACITY TO 350




These polished stainless steel casters are designed for light-duty applications where frequent washdowns are necessary. Ideally suited for applications exposed to cleaning agents, steam, caustic solutions, or other corrosive agents which could cause rust or corrosion.


TYPICAL APPLICATIONS

- Food Service
- Pharmaceuticals
- Laboratories
- Hospitals

SWIVEL CROSS SECTION



MOUNTING OPTION



FEATURES

- **Top Plate & Yoke:** Heavily embossed, Type 304 formed stainless steel to extend caster life under rugged conditions
- **Swivel Section:** Double stainless steel ball bearing raceways to resist wear and improve maneuverability
- **Finish:** "Polished" stainless steel finish maintains appearance in severe conditions
- **Kingpin:** 1/2" hydraulically formed stainless steel rivet
- **Axle:** 3/8" diameter Type 304 stainless steel solid axle with lock nut
- **Component Parts:** Bushing, axle and nut are all stainless steel
- **NSF:** Listed for food service industry
- Alternate or custom caster configurations available

RIG OPTIONS

- Sealed swivel specify **SS01**

BRAKE OPTIONS


To order, add brake code below to end of model. Example: 04XS05051SGL

Grip Lock specify **GL**



Face Contact specify **F**

BEARING OPTIONS



+ For swivel models add "S", for rigid model add "R" to end of base caster number.

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rating for normal operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+
-------------------------	----------------------	--	-------------------------	----------------------	-------------------	---------------------

Polypropylene (51 Delrin Bearing)

PB	3	1 1/4	250	4 1/4	1 5/16	1.50	04PB03051
	4	1 1/4	350	5 1/8	1 1/4	2.13	04PB04051
	5	1 1/4	350	6 3/16	1 1/2	2.63	04PB05051

Polyurethane on Polypropylene (51 Delrin Bearing)

XA	3	1 1/4	300	4 1/4	1 5/16	1.50	04XA03051
	3 1/2	1 1/4	350	4 11/16	1 1/4	1.75	04XA03X51
	4	1 1/4	350	5 1/8	1 1/4	2.50	04XA04051
	5	1 1/4	350	6 3/16	1 1/2	2.75	04XA05051

Prevenz™ antimicrobial models available. Add PREV to end of caster number.

Hi-Temp Phenolic (41 Plain Bore)

TR	4	1 1/4	300	5 1/8	1 1/4	2.50	04TR04041
	5	1 1/4	325	6 3/16	1 1/2	2.75	04TR05041

Phenolic (41 Plain Bore)

TM	3	1 1/4	350	4 1/4	1 5/16	1.50	04TM03041
	3 1/2	1 1/4	350	4 11/16	1 1/4	2.00	04TM03X41
	4	1 1/4	350	5 1/8	1 1/4	2.50	04TM04041
	5	1 1/4	350	6 3/16	1 1/2	2.75	04TM05041

	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rating for normal operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+
--	-------------------------	----------------------	--	-------------------------	----------------------	-------------------	---------------------

X-tra Soft Rubber Flat Tread (51 Delrin Bearing)*

XS	3	1 1/4	200	4 1/4	1 5/16	1.50	04XS03051
	3 1/2	1 1/4	250	4 11/16	1 1/4	1.75	04XS03X51
	4	1 1/4	300	5 1/8	1 1/4	2.50	04XS04051
	5	1 1/4	325	6 3/16	1 1/2	2.63	04XS05051

*Plain bore (41) bearing available. To order change "51" to other bearing code. Example: 04XS03041.

Prevenz™ antimicrobial models available. Add PREV to end of caster number.

Precision X-tra Soft Round Tread (28 Precision Ball Bearing)

XR	3	1 1/4	200	4 1/4	1 5/16	1.50	04XR03028
	3 1/2	1 1/4	250	4 11/16	1 1/4	1.75	04XR03X28
	4	1 1/4	300	5 1/8	1 1/4	2.25	04XR04028
	5	1 1/4	325	6 3/16	1 1/2	2.63	04XR05028

05


Medium Heavy Duty Stainless Steel Casters

CAPACITY TO 1200




This caster is the ideal solution for applications where frequent washdowns are necessary. The stainless steel caster is also well suited for applications exposed to cleaning agents, steam, caustic solutions, or other corrosive agents which could cause rust.

MOUNTING OPTION



SWIVEL CROSS SECTION



TYPICAL APPLICATIONS

- Food Processing/Service
- Bakery Dough Troughs
- Stainless Carts
- Pharmaceuticals
- Laboratory
- Clean Room
- Hospital Waste Management
- Marine
- Dollies



Stainless Steel



Premium Quality



Environmentally Friendly

FEATURES

- **Top Plate & Yoke:** Formed from superior 1/4" Type 304 stainless steel plate
- **Finish:** Highly polished stainless steel
- **Swivel Section:** Double stainless steel ball bearing raceways formed smooth for ease of swiveling
- **King Pin:** Stainless steel rivet
- **Axle:** 1/2" diameter, stainless steel hollow with roller bearing. Solid axle with Delrin and precision ball bearings
- **Legs:** 1/4" stainless steel formed for added strength welded to the yoke base
- **Spanner Bushing:** Type 304 Stainless Steel
- **Zerk Fitting:** Type 304 Stainless Steel
- **NSF** Consult factory
- Alternate or custom caster configurations available

RIG OPTIONS

- **Neoprene sealed swivel** section specify **NS05**
- **Notched seal kit** specify **SD016001**

BRAKE OPTIONS

To order, add brake code below to end of model. Example: 05XS06201SCB

Stainless Steel Cam specify **CB**.

Specify 1 Piece Delrin Bearing (52)



Face
Specify **FBD**



Face
Specify **FBG**



Swivel Lock
(welded)
specify **L**

BEARING OPTIONS



Stainless Steel Roller (01) Bronze (22) Stainless Precision Ball (28)
Stainless Pedestal Precision (29) 2-Piece Delrin* (51) 1-Piece Delrin* (52)
*Stainless steel spanner.

Note: Wheel capacities can change with each bearing type. Consult factory.

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for normal operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wk. (LBS)	Base Caster Number+
--	-------------------------	----------------------	--	-------------------------	----------------------	-------------------	---------------------

X-tra Soft (Flat Tread) (01 Stainless Steel Roller Bearing)*

XS	4	2	400	5 ⁵ / ₈	17 ¹ / ₁₆	5 ¹ / ₄	05XS04201
	5	2	500	6 ¹ / ₂	1 ⁵ / ₈	5 ¹ / ₄	05XS05201
	6	2	600	7 ¹ / ₂	1 ⁷ / ₈	5 ³ / ₄	05XS06201
	8	2	675	9 ¹ / ₂	2 ³ / ₈	6	05XS08201

Prevenz™ antimicrobial models available.
Add PREV to end of caster number.
*Delrin (51) Bearings available.
To order change "01" to other bearing code.
Delrin example: 05XS04251.

X-tra Soft Round Tread (01 Stainless Steel Roller Bearing)*

XR	6	2	450	7 ¹ / ₂	1 ⁷ / ₈	5 ³ / ₄	05XR06201
	8	2 <td>600 <td>9¹/₂ <td>2³/₈ <td>6</td> <td>05XR08201</td> </td></td></td>	600 <td>9¹/₂ <td>2³/₈ <td>6</td> <td>05XR08201</td> </td></td>	9 ¹ / ₂ <td>2³/₈ <td>6</td> <td>05XR08201</td> </td>	2 ³ / ₈ <td>6</td> <td>05XR08201</td>	6	05XR08201

Prevenz™ antimicrobial models available.
Add PREV to end of caster number.
*Delrin (51) Bearings available.
To order change "01" to other bearing code.
Delrin example: 05XR06251.

Moldon on Rubber on Aluminum (01 Stainless Steel Roller Bearing)

MD	4	1 ¹ / ₂	250	5 ⁵ / ₈	17 ¹ / ₁₆	4 ³ / ₄	05MD04101
	5 <th>1¹/₂</th> <td>300</td> <td>6¹/₂</td> <td>1⁵/₈</td> <td>5</td> <td>05MD05101</td>	1 ¹ / ₂	300	6 ¹ / ₂	1 ⁵ / ₈	5	05MD05101
	6	2	550	7 ¹ / ₂	1 ⁷ / ₈	6	05MD06201
	8	2	600	9 ¹ / ₂	2 ³ / ₈	6 ¹ / ₂	05MD08201

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for normal operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wk. (LBS)	Base Caster Number+
--	-------------------------	----------------------	--	-------------------------	----------------------	-------------------	---------------------

Polypropylene (01 Stainless Steel Roller Bearing)*

PB	4	2	450	5 ⁵ / ₈	17 ¹ / ₁₆	3 ³ / ₄	05PB04201
	5	2	550	6 ¹ / ₂	1 ⁵ / ₈	4 ¹ / ₂	05PB05201
	6	2	650	7 ¹ / ₂	1 ⁷ / ₈	4 ³ / ₄	05PB06201
	8	2	850	9 ¹ / ₂	2 ³ / ₈	6 ¹ / ₄	05PB08201

*Delrin (51) Bearings available.
To order change "01" to other bearing code.
Delrin example: 05PB06251.

RETORT High Temp Polypropylene (41 Plain Bore)


RW	4	2	500	5 ⁵ / ₈	17 ¹ / ₁₆	3 ³ / ₄	05RW04241
	5	2	650	6 ¹ / ₂	1 ⁵ / ₈	5 ¹ / ₄	05RW05241
	6	2	700	7 ¹ / ₂	1 ⁷ / ₈	5 ¹ / ₂	05RW06241
	8	2	900	9 ¹ / ₂	2 ³ / ₈	6 ¹ / ₄	05RW08241


Polyurethane on Alum. Round Tread (28 Stainless Precision Ball Bearing)

PM	5	2	1000	6 ¹ / ₂	1 ⁵ / ₈	6	05PM05228
	6	2	1200	7 ¹ / ₂	1 ⁷ / ₈	7	05PM06228
	8	2	1200	9 ¹ / ₂	2 ³ / ₈	9	05PM08228


Continue on next page >>

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

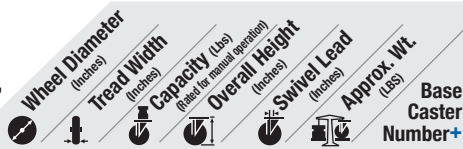


Eagle Polyurethane on Polypropylene (01 Stainless Roller Bearing)*							
EG 	4	2	600	5 ⁵ / ₈	17/16	5	05EG04201
	5	2	900	6 ¹ / ₂	1 ⁵ / ₈	5 ¹ / ₄	05EG05201
	6	2	1100	7 ¹ / ₂	17/8	5 ³ / ₄	05EG06201
	8	2	1200	9 ¹ / ₂	2 ³ / ₈	7	05EG08201


*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin Example: 05EG04251.

Polyurethane on Polypropylene (01 Stainless Steel Roller Bearing)*							
XA 	4	2	600	5 ⁵ / ₈	17/16	5	05XA04201
	5	2	750	6 ¹ / ₂	1 ⁵ / ₈	5 ¹ / ₄	05XA05201
	6	2	900	7 ¹ / ₂	17/8	5 ³ / ₄	05XA06201
	8	2	1000	9 ¹ / ₂	2 ³ / ₈	7	05XA08201


Prevenz™ antimicrobial models available. Add PREV to end of caster number.
*Delrin (51) Bearings available. Change "01" to other bearing code. Delrin Example: 05XA04251.

X-Treme™ Plus Solid Polyurethane (01 Stainless Steel Roller Bearing)							
XP 	4	2	1200	5 ⁵ / ₈	17/16	4 ¹ / ₄	05XP04201
	5	2	1200	6 ¹ / ₂	1 ⁵ / ₈	5	05XP05201
	6	2	1200	7 ¹ / ₂	17/8	5 ¹ / ₂	05XP06201
	8	2	1200	9 ¹ / ₂	2 ³ / ₈	6 ¹ / ₂	05XP08201


*Bronze (22), Stainless Pedestal Precision (29), Annular Ball (31) and Delrin (51) bearings available. To order change "01" to other bearing code. Stainless Pedestal Precision example: 05XP04229.

X-Treme™ Solid Polyurethane (01 Stainless Steel Roller Bearing)*							
XI 	4	2	1000	5 ⁵ / ₈	17/16	4 ¹ / ₄	05XI04201
	5	2	1000	6 ¹ / ₂	1 ⁵ / ₈	5	05XI05201
	6	2	1000	7 ¹ / ₂	17/8	5 ¹ / ₂	05XI06201
	8	2	1000	9 ¹ / ₂	2 ³ / ₈	6 ¹ / ₂	05XI08201


*Bronze (22), Stainless Pedestal Precision (29), Annular Ball (31) and Delrin (51) bearings available. To order change "01" to other bearing code. Stainless Pedestal Precision example: 05XI04229.

Solid Elastomer (01 Stainless Steel Roller Bearing)*							
SE 	4	2	1000	5 ⁵ / ₈	17/16	4 ¹ / ₄	05SE04201
	5	2	1000	6 ¹ / ₂	1 ⁵ / ₈	5	05SE05201
	6	2	1100	7 ¹ / ₂	17/8	5 ¹ / ₂	05SE06201
	8	2	1200	9 ¹ / ₂	2 ³ / ₈	6 ¹ / ₂	05SE08201

*Bronze (22) and Stainless Pedestal Precision (29) bearings available. To order change "01" to other bearing code. Pedestal Precision example: 05SE04229.


Phenolic (01 Stainless Steel Roller Bearing)*							
TM 	4	2	800	5 ⁵ / ₈	17/16	5	05TM04201
	5	2	1000	6 ¹ / ₂	1 ⁵ / ₈	5 ¹ / ₄	05TM05201
	6	2	1200	7 ¹ / ₂	17/8	6 ¹ / ₄	05TM06201
	8	2	1200	9 ¹ / ₂	2 ³ / ₈	8	05TM08201


*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 05TM06251.

Straight Sided Phenolic (01 Stainless Steel Roller Bearing)*							
TH 	4	2	800	5 ⁵ / ₈	17/16	5	05TH04201
	5	2	1000	6 ¹ / ₂	1 ⁵ / ₈	5 ¹ / ₂	05TH05201
	6	2	1200	7 ¹ / ₂	17/8	6 ¹ / ₄	05TH06201


*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 05TH06251.

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

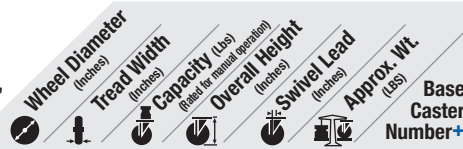



Maxim® (01 Stainless Steel Roller Bearing)*							
NG 	4	2	800	5 ⁵ / ₈	17/16	5	05NG04201
	5	2	1000	6 ¹ / ₂	1 ⁵ / ₈	5 ¹ / ₄	05NG05201
	6	2	1200	7 ¹ / ₂	17/8	5 ³ / ₄	05NG06201
	8	2	1200	9 ¹ / ₂	2 ³ / ₈	7	05NG08201

Prevenz™ antimicrobial models available. Add PREV to end of caster number.
*Bronze (22), Stainless Pedestal Precision (29), Annular Ball (31) and Delrin (51) bearings available. To order change "01" to other bearing code. Stainless Pedestal Precision example: 05NG04229.


White Nylon (01 Stainless Steel Roller Bearing)*							
NW 	5	2	600	6 ¹ / ₂	1 ⁵ / ₈	5 ¹ / ₄	05NW05201
	6	2	900	7 ¹ / ₂	17/8	5 ³ / ₄	05NW06201
	8	2	1100	9 ¹ / ₂	2 ³ / ₈	6 ¹ / ₂	05NW08201

*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 05NW06251.

Glass Filled Polypropylene (01 Stainless Steel Roller Bearing)							
RT 	4	2	800	5 ⁵ / ₈	17/16		05RT04201
	5	2	1000	6 ¹ / ₂	1 ⁵ / ₈		05RT05201
	6	2	1200	7 ¹ / ₂	17/8		05RT06201
	8	2	1200	9 ¹ / ₂	2 ³ / ₈		05RT08201

High Temp Glass Filled Nylon (01 Stainless Steel Roller Bearing)							
HT 	4	2	800	5 ⁵ / ₈	17/16		05HT04201
	5	2	1000	6 ¹ / ₂	1 ⁵ / ₈		05HT05201
	6	2	1200	7 ¹ / ₂	17/8		05HT06201
	8	2	1200	9 ¹ / ₂	2 ³ / ₈		05HT08201

Prevenz™ Antimicrobial Wheels
The EPA registered and FDA compliant antimicrobial additive used in Prevenz™ wheels is designed to suppress the growth of a variety of destructive and odor causing microbes including bacteria, molds, mildew and fungi. To order add "PREV" to end of caster number.



XS Prevenz™ XR Prevenz™ XA Prevenz™ NG Prevenz™

05 SERIES • CAPACITY TO 1200

STAINLESS STEEL

120

Contender™ Kingpinless Stainless Steel CAPACITY TO 1200




The 120 Series is constructed from 304 stainless steel and features a precision machined swivel section that is welded inside and outside to legs for maximum durability. The stainless construction is highly polished and ideal for applications exposed to cleaning agents, washdowns, caustic solutions, steam, marine environments or any other corrosive agents that could cause rust.

TYPICAL APPLICATIONS


- Food Processing
- Bakery Dough Troughs
- Stainless Carts
- Pharmaceuticals
- Laboratory
- Hospital Waste Management
- Marine
- Dollies

SWIVEL CROSS SECTION




MOUNTING OPTIONS

Standard Plate



Special Order Plate*



* Available on 6" and 8" wheel diameter models; consult factory



Stainless Steel



Premium Quality



Ergonomic



Environmentally Friendly



Towing^

FEATURES

- **Top Plate:** 5/16" 304 stainless steel and welded construction for longer life
- **Yoke Base:** Notched 304 stainless steel welded inside and out
- **Legs:** 304 stainless welded inside and out
- **Swivel Section:** One row of 3/8" ball bearings mounted in a precision machined raceway. Zerk in swivel section
- **Axle:** 1/2" diameter hollow axle with zerk fitting on roller and tapered bearing models (Solid axle on Delrin, and precision ball models)
- **NSF:** Consult Factory
- Alternate or custom caster configurations available

RIG OPTIONS

- **Optional Overall height** of 10-1/8" available for 8" wheel diameter models; to specify, remove "-01" from end of caster number

BRAKE OPTIONS

To order, add brake code below to end of model. Example: 120XS06201S**FBD**

Single Side specify **SSB120**. **Double Sided** specify **DSB120**



Face specify **FBD**

Face specify **FBG**



Hand operated field installable swivel lock order **L**

BEARING OPTIONS



+ For swivel models add "S", for rigid model add "R" to end of base caster number.

Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for normal operation)	Overall Height (Inches)	Swivel Lead (Inches)	Base Caster Number+
-------------------------	----------------------	---	-------------------------	----------------------	---------------------

X-tra Soft (Round Tread) (01 Stainless Steel Roller Bearing)*

XR	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs)	Overall Height (Inches)	Swivel Lead (Inches)	Base Caster Number+
	6	2	450	7 1/2	19/16	120XR06201
	8	2	600	9 1/2	2 1/4	120XR08201S-01

Prevenz™ antimicrobial models available. Add PREV to end of model.
*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 120XR06251.

Polypropylene (01 Stainless Steel Roller Bearing)*

PB	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs)	Overall Height (Inches)	Swivel Lead (Inches)	Base Caster Number+
	4	2	450	5 5/8	13/16	120PB04201
	5	2	650	6 1/2	1 3/8	120PB05201
	6	2	750	7 1/2	19/16	120PB06201
	8	2	1000	9 1/2	2 1/4	120PB08201S-01

*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 120PB06251.

RETORT High Temp Polypropylene (41 Plain Bore)


RW	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs)	Overall Height (Inches)	Swivel Lead (Inches)	Base Caster Number+
	4	2	500	5 5/8	13/16	120RW04241
	5	2	650	6 1/2	1 3/8	120RW05241
	6	2	700	7 1/2	19/16	120RW06241
	8	2	900	9 1/2	2 1/4	120RW08241S-01

X-tra Soft (Flat Tread) (01 Stainless Steel Roller Bearing)*	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for normal operation)	Overall Height (Inches)	Swivel Lead (Inches)	Base Caster Number+
--	-------------------------	----------------------	---	-------------------------	----------------------	---------------------

XS	4	2	400	5 5/8	13/16	120XS04201
	5	2	500	6 1/2	1 3/8	120XS05201
	6	2	600	7 1/2	19/16	120XS06201
	8	2	675	9 1/2	2 1/4	120XS08201S-01

Prevenz™ antimicrobial models available. Add PREV to end of model.
*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 120XS04251.

+ For swivel models add "S", for rigid model add "R" to end of base caster number.



Polyurethane on Aluminum Round Tread (28 Stainless Precision Ball Bearings)

PM	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	5	2	1000	6 1/2	1 3/8	120PM05228
	6	2	1200	7 1/2	1 9/16	120PM06228
	8	2	1200	9 1/2	2 1/4	120PM08228S-01

Eagle Polyurethane on Polypropylene (28 Stainless Precision Ball Bearing)*

EG	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	600	5 5/8	1 3/16	120EG04228
	5	2	900	6 1/2	1 3/8	120EG05228
	6	2	1100	7 1/2	1 9/16	120EG06228
	8	2	1200	9 1/2	2 1/4	120EG08228S-01

*Delrin (51) Bearings available. To order change "28" to other bearing code. Delrin example: 120EG04251.

Polyurethane on Polypropylene (01 Stainless Steel Roller Bearing)*

XA	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	600	5 5/8	1 3/16	120XA04201
	5	2	750	6 1/2	1 3/8	120XA05201
	6	2	900	7 1/2	1 9/16	120XA06201
	8	2	1000	9 1/2	2 1/4	120XA08201S-01

Prevenz™ antimicrobial models available. Add PREV to end of model.

*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 120XA04251.

X-Treme™ Plus Solid Polyurethane (01 Stainless Steel Roller Bearing)

XP	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	1200	5 5/8	1 3/16	120XP04201
	5	2	1200	6 1/2	1 3/8	120XP05201
	6	2	1200	7 1/2	1 9/16	120XP06201
	8	2	1200	9 1/2	2 1/4	120XP08201S-01

X-Treme™ Solid Polyurethane (01 Stainless Steel Roller Bearing)

XI	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	1000	5 5/8	1 3/16	120XI04201
	5	2	1000	6 1/2	1 3/8	120XI05201
	6	2	1000	7 1/2	1 9/16	120XI06201
	8	2	1000	9 1/2	2 1/4	120XI08201S-01

Phenolic (01 Stainless Steel Roller Bearing)*


TM	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	800	5 5/8	1 3/16	120TM04201
	5	2	1000	6 1/2	1 3/8	120TM05201
	6	2	1200	7 1/2	1 9/16	120TM06201
	8	2	1200	9 1/2	2 1/4	120TM08201S-01

*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 120TM06251.

Straight Sided Phenolic (01 Stainless Steel Roller Bearing)

TH	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	800	5 5/8	1 3/16	120TH04201
	5	2	1000	6 1/2	1 3/8	120TH05201
	6	2	1200	7 1/2	1 9/16	120TH06201

+ For swivel models add "S", for rigid model add "R" to end of base caster number.



Solid Elastomer (01 Stainless Steel Roller Bearing)*

SE	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	1000	5 5/8	1 3/16	120SE04201
	5	2	1200	6 1/2	1 3/8	120SE05201
	6	2	1200	7 1/2	1 9/16	120SE06201
	8	2	1200	9 1/2	2 1/4	120SE08201S-01

*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: 120SE06251.

Maxim® (01 Stainless Steel Roller Bearing)*

NG	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	800	5 5/8	1 3/16	120NG04201
	5	2	1000	6 1/2	1 3/8	120NG05201
	6	2	1200	7 1/2	1 9/16	120NG06201
	8	2	1200	9 1/2	2 1/4	120NG08201S-01

Prevenz™ antimicrobial models available. Add PREV to end of model.

*Bronze (22), Stainless Pedestal Precision (29), Annular Ball (31) and Delrin (51) bearings available. To order change "01" to other bearing code. Stainless Pedestal Precision example: 120NG04251.

White Nylon (01 Stainless Steel Roller Bearing)*

NW	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	5	2	600	6 1/2	1 3/8	120NW05201
	6	2	900	7 1/2	1 9/16	120NW06201
	8	2	1100	9 1/2	2 1/4	120NW08201S-01

*Delrin (51) Bearings or plain bore (00) models available. To order change "01" to other bearing code. Delrin example: 120NW05251.

Glass Filled Polypropylene (01 Stainless Steel Roller Bearing)


RT	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	800	5 5/8	1 3/16	120RT04201
	5	2	1000	6 1/2	1 3/8	120RT05201
	6	2	1200	7 1/2	1 9/16	120RT06201
	8	2	1200	9 1/2	2 1/4	120RT08201S-01

High Temp Glass Filled Nylon (01 Stainless Steel Roller Bearing)

HT	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs) (Rated for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Base Caster Number+
	4	2	800	5 5/8	1 3/16	120HT04201
	5	2	1000	6 1/2	1 3/8	120HT05201
	6	2	1200	7 1/2	1 9/16	120HT06201
	8	2	1200	9 1/2	2 1/4	120HT08201S-01

Prevenz™ Antimicrobial Wheels

The EPA registered and FDA compliant antimicrobial additive used in Prevenz™ wheels is designed to suppress the growth of a variety of destructive and odor causing microbes including bacteria, molds, mildew and fungi. To order add "PREV" to end of caster number.



THE POWER OF STAINLESS & PREVENZ™

THE SAFE SOLUTION.

How Does Prevenz™ Work?

The antimicrobial compound used in Prevenz™ wheels is designed to suppress the growth of a variety of destructive and odor causing microbes including bacteria, molds, mildew, and fungi. The active ingredients neutralize the ability of microbes to function, grow and reproduce.

How long does the protection last?

Prevenz™ is engineered to be effective against microbes for the life of the wheel. The agent remains stored in the polymer and is gradually released to the surface of the wheel.

Will scratches, tread wear or wax buildup diminish the effectiveness?

No. Prevenz™ protection is not a coating on the surface of the wheel. It is an integral part of the wheel material. Abrasion, chips or scratches will not impact the effectiveness of Prevenz™ in any way. Not even wax buildup on the wheel can impair the bacteria fighting performance.


Does Prevenz™ eliminate the need for cleaning?

No. Although Prevenz™ provides an added level of protection, these wheels do not eliminate the need for normal cleaning practices. They are designed to work in conjunction with and enhance your ongoing program. Good hygiene practices should always be observed.


Is Prevenz™ safe?

Yes. The active ingredients in Prevenz™ have undergone extensive laboratory testing and have been proven safe. The active ingredient has a history of hospital use for more than 30 years and is used in a broad range of popular personal care products, such as antimicrobial soap, toothpaste and deodorant. It is registered with the US Environmental Protection Agency (EPA), and products with this material have been approved by the US Food & Drug Administration (FDA), the European Union (EU), the National Sanitation Foundation (NSF) and other regulatory authorities around the world.


The EPA registered and FDA compliant antimicrobial additive used in Prevenz™ wheels is designed to suppress the growth of a variety of destructive and odor causing microbes including bacteria, molds, mildew and fungi. These wheels are suitable for a variety of applications including medical equipment, food equipment, pharmaceutical, chemical, meat & poultry, processing plants and more. To order add "PREV" to end of model number.



Without Prevenz™

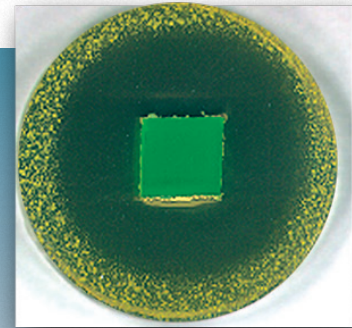

With Prevenz™



XA Prevenz™



XA Prevenz™
Heavy Duty




XS Prevenz™



XS Prevenz™
Heavy Duty



XR Prevenz™



XR Prevenz™
Heavy Duty



NG Prevenz™



Medical



Clean Industrial



Food Packaging and Processing



Beverage Industry



Pharmaceutical



Bakery Factory

COMBINE OUR STAINLESS OFFERING WITH PREVENZ™ WHEELS

TO HAVE THE BEST PROTECTION
AGAINST CORROSION AND
DESTRUCTIVE MICROBES.

05 SERIES WITH XA PREVENZ WHEEL

View our complete lineup of stainless
and Prevenz options Pages 77 – 86.

ALBION[®]
the caster experts



330


Contender™ Kingpinless Premium Stainless Steel

CAPACITY TO 3000



For your heaviest duty applications, the 330 Series features a thick precision machined premium grade 316 stainless swivel section and 304 stainless steel rig—both highly polished. Ideal for applications exposed to cleaning agents, washdowns, caustic solutions, steam, marine environments, or any other corrosive agents which could cause rust.


MOUNTING OPTIONS Standard Plate




TYPICAL APPLICATIONS

- Food Processing
- Bakery Dough Troughs
- Stainless Carts
- Pharmaceuticals
- Laboratory
- Hospital Waste Management
- Marine
- Dollies

SWIVEL CROSS SECTION



+ For swivel models add "S", for rigid model add "R" to end of base caster number.



X-tra Soft Round Tread (01 Stainless Steel Roller Bearing)*

XR 10 | 2 1/2 | 850 | 11 1/2 | 2 1/4 | 330XR10401



*Stainless Precision Ball (28) bearings available. To order change "01" to "28". Stainless Precision example: 330XR10428.

X-treme Plus Solid Poly. (28 Stainless Steel Ball Precision Bearing)*

XP 8 | 2 1/2 | 2000 | 10 1/8 | 2 1/16 | 330XP08428
 8 | 3 | 2000 | 10 1/8 | 2 1/16 | 330XP08528
 10 | 2 1/2 | 2500 | 11 1/2 | 2 1/4 | 330XP10428
 10 | 3 | 2500 | 11 1/2 | 2 1/4 | 330XP10528



*Stainless Roller (01) bearings available. To order change "28" to other bearing code. Stainless Roller example: 330XP08401.



Stainless Steel



Premium Quality



Ergonomic



Environmentally Friendly



Towing^

FEATURES

- **Top Plate:** 5/16" 304 stainless steel welded inside and out to 316 stainless steel raceway for longer life
- **Swivel Section:** One row of 1/2" ball bearings mounted in a precision machined raceway. Zerk in swivel section
- **Yoke Base:** Notched 316 stainless steel
- **Legs:** 304 stainless steel welded inside and out
- **Axle:** 3/4" diameter
- **NSF:** Consult Factory
- Alternate or custom caster configurations available

BRAKE OPTIONS

Consult factory for stainless steel brakes.

BEARING OPTIONS



+ For swivel models add "S", for rigid model add "R" to end of base caster number.



Polyurethane on Aluminum (01 Stainless Steel Roller Bearing)*

PD	8	2 1/2	2010	10 1/8	2 1/16	330PD08401
	8	3	2520	10 1/8	2 1/16	330PD08501
	10	2 1/2	2370	11 1/2	2 1/4	330PD10401
	10	3	3000	11 1/2	2 1/4	330PD10501



*Stainless Precision Ball (28) bearings available. To order change "01" to other bearing code. Stainless Precision example: 330PD10428.

Phenolic (01 Stainless Steel Roller Bearing)*

TM	6	2 1/2	1600	7 1/2	1 3/8	330TM06401
	6	3	2000	7 1/2	1 3/8	330TM06501
	8	2 1/2 <td>2000</td> <td>10 1/8</td> <td>2 1/16</td> <td>330TM08401</td>	2000	10 1/8	2 1/16	330TM08401
	8	3	2500	10 1/8	2 1/16	330TM08501
	10	2 1/2 <td>2500</td> <td>11 1/2</td> <td>2 1/4</td> <td>330TM10401</td>	2500	11 1/2	2 1/4	330TM10401
	10	3	2900	11 1/2	2 1/4	330TM10501
	12	2 1/2 <td>3000</td> <td>13 1/2</td> <td>2 1/16</td> <td>330TM12401</td>	3000	13 1/2	2 1/16	330TM12401
	12	3	3000	13 1/2	2 1/16	330TM12501



*Stainless Precision Ball (28) bearings available. To order change "01" to "28". Stainless Precision example: 330TM06428.

Heat Resistant Phenolic (01 Stainless Steel Roller Bearing)*

TR	6	3	2000	7 1/2	1 3/8	330TR06501
	8 <td>3</td> <td>2500</td> <td>10 1/8</td> <td>2 1/16</td> <td>330TR08501</td>	3	2500	10 1/8	2 1/16	330TR08501
	10 <td>3</td> <td>2900</td> <td>11 1/2</td> <td>2 1/4</td> <td>330TR10501</td>	3	2900	11 1/2	2 1/4	330TR10501
	12 <td>3</td> <td>3000</td> <td>13 1/2</td> <td>2 1/16</td> <td>330TR12501</td>	3	3000	13 1/2	2 1/16	330TR12501



*Stainless Precision Ball (28) bearings available. To order change "01" to other bearing code. Stainless Precision example: 330TR06528.

Trionix™ High Impact Polymer (28 Stainless Steel Precision Ball Bearing)

NX	6	2 1/2	3000	7 1/2	1 3/8	330NX06428
	6 <td>3</td> <td>3000</td> <td>7 1/2</td> <td>1 3/8</td> <td>330NX06528</td>	3	3000	7 1/2	1 3/8	330NX06528
	8 <td>2 1/2 <td>3000</td> <td>10 1/8</td> <td>2 1/16</td> <td>330NX08428</td> </td>	2 1/2 <td>3000</td> <td>10 1/8</td> <td>2 1/16</td> <td>330NX08428</td>	3000	10 1/8	2 1/16	330NX08428
	8 <td>3</td> <td>3000</td> <td>10 1/8</td> <td>2 1/16</td> <td>330NX08528</td>	3	3000	10 1/8	2 1/16	330NX08528
	10	2 1/2 <td>3000</td> <td>11 1/2</td> <td>2 1/4</td> <td>330NX10428</td>	3000	11 1/2	2 1/4	330NX10428
	10	3	3000	11 1/2	2 1/4	330NX10528



E5


Medium Heavy Duty Stainless Steel Casters

CAPACITY TO 900



Constructed from 3/16" thick 304 stainless steel, the E5 Series is a more economical option for 2" wide wheel applications not needing the durability of the 05 Series or 120 Series. Ideal for applications exposed to cleaning agents, washdowns, caustic solutions, steam, marine environments, or other corrosive agents which could cause rust.

MOUNTING OPTIONS



SWIVEL CROSS SECTION



TYPICAL APPLICATIONS

- Food Processing
- Bakery Dough Troughs
- Stainless Carts
- Pharmaceuticals
- Laboratory
- Hospital Waste Management
- Marine
- Dollies



Stainless Steel



Economical



Environmentally Friendly

FEATURES

- **Top Plate & Yoke:** Formed from 3/16" Type 304 stainless steel plate
- **Finish:** Stainless steel
- **Swivel Section:** Double stainless steel ball bearing raceways formed smooth for ease of swiveling
- **King Pin:** Stainless steel rivet
- **Axle:** 1/2" diameter, stainless steel hollow with roller bearing. Solid axle with Delrin and precision ball bearings
- **Legs:** 3/16" stainless steel formed for added strength welded to the yoke base
- **Spanner Bushing:** Type 304 Stainless Steel
- **Zerk Fitting:** Type 304 Stainless Steel
- **NSF:** Consult factory
- Alternate or custom caster configurations available

RIG OPTIONS

- Neoprene sealed swivel section specify **NS05**
- Notched seal kit. Specify **SD016001**

BRAKE OPTIONS

To order, add brake code below to end of model. Example: E5XS06201**SCB**

Stainless Steel Cam specify **CB**

Specify 1 Piece Delrin Bearing (52)



Face Specify **FBF**



Face Specify **FBG**

BEARING OPTIONS



Hand operated field installable swivel lock order **SL1200000** separately

Note: Wheel capacities can change with each bearing type. Consult factory.

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

X-tra Soft (Flat Tread) (01 Stainless Steel Roller Bearing)*

Model	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+
XS	4	2	350	5 ⁵ / ₈	1 ⁵ / ₈	5 ¹ / ₄	E5XS04201
	5	2	375	6 ¹ / ₂	1 ³ / ₄	5 ¹ / ₄	E5XS05201
	6	2	600	7 ¹ / ₂	2 ¹ / ₁₆	5 ³ / ₄	E5XS06201
	8	2	675	9 ¹ / ₂	2 ⁹ / ₁₆	6	E5XS08201

Prevenz™ antimicrobial models available.
Add PREV to end of caster number.
*Delrin (51) Bearings available.
To order change "01" to other bearing code.
Delrin example: E5XS04251.

X-tra Soft (Round Tread) (01 Stainless Steel Roller Bearing)*

Model	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+
XR	6	2	450	7 ¹ / ₂	2 ¹ / ₁₆	5 ³ / ₄	E5XR06201
	8	2	600	9 ¹ / ₂	2 ⁹ / ₁₆	6	E5XR08201

Prevenz™ antimicrobial models available.
Add PREV to end of caster number.
*Delrin (51) Bearings available.
To order change "01" to other bearing code.
Delrin example: E5XR06251.

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

Polypropylene (01 Stainless Steel Roller Bearing)*

Model	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+
PB	4	2	450	5 ⁵ / ₈	1 ⁵ / ₈	3 ³ / ₄	E5PB04201
	5	2	550	6 ¹ / ₂	1 ³ / ₄	4 ¹ / ₂	E5PB05201
	6	2	650	7 ¹ / ₂	2 ¹ / ₁₆	4 ³ / ₄	E5PB06201
	8	2	850	9 ¹ / ₂	2 ⁹ / ₁₆	6 ¹ / ₄	E5PB08201

*Delrin (51) Bearings available.
To order change "01" to other bearing code.
Delrin example: E5PB06251.

Retort High Temp Polypropylene (41 Plain Bore)


Model	Wheel Diameter (Inches)	Tread Width (Inches)	Capacity (Lbs) (Rated for manual operation)	Overall Height (Inches)	Swivel Lead (Inches)	Approx. Wt. (Lbs)	Base Caster Number+
RW	4	2	500	5 ⁵ / ₈	1 ⁵ / ₈	3 ³ / ₄	E5RW04241
	5	2	650	6 ¹ / ₂	1 ³ / ₄	5 ¹ / ₄	E5RW05241
	6	2	700	7 ¹ / ₂	2 ¹ / ₁₆	5 ¹ / ₂	E5RW06241
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆	6 ¹ / ₄	E5RW08241

Continue on next page >>

E5 SERIES • CAPACITY TO 900

STAINLESS STEEL

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

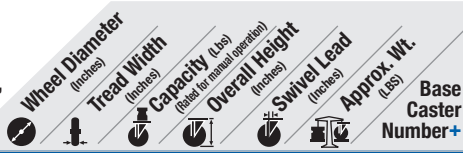

Polyurethane on Polypropylene (01 Stainless Steel Roller Bearing)*

XA	Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs) (Rate for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Base Caster Number+
	4	2	600	5 ⁵ / ₈	1 ⁵ / ₈	5	E5XA04201
	5	2	750	6 ¹ / ₂	1 ³ / ₄	5 ¹ / ₄	E5XA05201
	6	2	900	7 ¹ / ₂	2 ¹ / ₁₆	5 ³ / ₄	E5XA06201
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆	7	E5XA08201

Prevenz™ antimicrobial models available. Add PREV to end of caster number.
*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: E5XA04251.

X-Treme™ Plus Solid Polyurethane (01 Stainless Steel Roller Bearing)*

XP	Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs) (Rate for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Base Caster Number+
	4	2	900	5 ⁵ / ₈	1 ⁵ / ₈	4 ¹ / ₄	E5XP04201
	5	2	900	6 ¹ / ₂	1 ³ / ₄	5	E5XP05201
	6	2	900	7 ¹ / ₂	2 ¹ / ₁₆	5 ¹ / ₂	E5XP06201
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆	6 ¹ / ₂	E5XP08201

*Bronze (22), Stainless Pedestal Precision (29), and Delrin (51) bearings available. To order change "01" to other bearing code. Stainless Pedestal Precision example: E5XP04229.

Solid Elastomer (01 Stainless Steel Roller Bearing)*

SE	Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs) (Rate for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Base Caster Number+
	4	2	900	5 ⁵ / ₈	1 ⁵ / ₈	4 ¹ / ₄	E5SE04201
	5	2	900	6 ¹ / ₂	1 ³ / ₄	5	E5SE05201
	6	2	900	7 ¹ / ₂	2 ¹ / ₁₆	5 ¹ / ₂	E5SE06201
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆	6 ¹ / ₂	E5SE08201


Delrin (51) bearings available. To order change "01" to other bearing code. Delrin example: E5SE04251.

Phenolic (01 Stainless Steel Roller Bearing)*

TM	Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs) (Rate for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Base Caster Number+
	4	2	800	5 ⁵ / ₈	1 ⁵ / ₈	5	E5TM04201
	5	2	900	6 ¹ / ₂	1 ³ / ₄	5 ¹ / ₄	E5TM05201
	6	2	900	7 ¹ / ₂	2 ¹ / ₁₆	6 ¹ / ₄	E5TM06201
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆	8	E5TM08201

*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: E5TM06251.

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

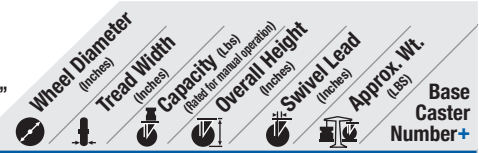

Maxim® (01 Stainless Steel Roller Bearing)*

NG	Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs) (Rate for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Base Caster Number+
	4	2	800	5 ⁵ / ₈	1 ⁵ / ₈	5	E5NG04201
	5	2	900	6 ¹ / ₂	1 ³ / ₄	5 ¹ / ₄	E5NG05201
	6	2	900	7 ¹ / ₂	2 ¹ / ₁₆	5 ³ / ₄	E5NG06201
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆	7	E5NG08201

Prevenz™ antimicrobial models available. Add PREV to end of caster number.
*Bronze (22), Stainless Pedestal Precision (29), and Delrin (51) bearings available. To order change "01" to other bearing code. Stainless Pedestal Precision example: E5NG04229.

White Nylon (01 Stainless Steel Roller Bearing)*

NW	Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs) (Rate for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Base Caster Number+
	5	2	600	6 ¹ / ₂	1 ³ / ₄	5 ¹ / ₄	E5NW05201
	6	2	900	7 ¹ / ₂	2 ¹ / ₁₆	5 ³ / ₄	E5NW06201
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆	6 ¹ / ₂	E5NW08201

*Delrin (51) Bearings available. To order change "01" to other bearing code. Delrin example: E5NW06251.

Glass Filled Polypropylene (01 Stainless Steel Roller Bearing)

RT	Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs) (Rate for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Base Caster Number+
	4	2	800	5 ⁵ / ₈	1 ⁵ / ₈		E5RT04201
	5	2	900	6 ¹ / ₂	1 ³ / ₄		E5RT05201
	6	2	900	7 ¹ / ₂	2 ¹ / ₁₆		E5RT06201
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆		E5RT08201

High Temp Glass Filled Nylon (01 Stainless Steel Roller Bearing)

HT	Wheel Diameter (inches)	Tread Width (inches)	Capacity (Lbs) (Rate for manual operation)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (Lbs)	Base Caster Number+
	4	2	800	5 ⁵ / ₈	1 ⁵ / ₈		E5HT04201
	5	2	900	6 ¹ / ₂	1 ³ / ₄		E5HT05201
	6	2	900	7 ¹ / ₂	2 ¹ / ₁₆		E5HT06201
	8	2	900	9 ¹ / ₂	2 ⁹ / ₁₆		E5HT08201

Prevenz™ Antimicrobial Wheels

The EPA registered and FDA compliant antimicrobial additive used in Prevenz™ wheels is designed to suppress the growth of a variety of destructive and odor causing microbes including bacteria, molds, mildew and fungi. To order add "PREV" to end of caster number.

