

Ball Soft Tread

Features

- Industry leading selection and overall value
- Fast deliveries for any order quantity
- Self-lubricating acetyl resin bearing
- No exposed axle
- Rubber tread; Urethane for 1-9/16" diameter models

Applications

- Store Fixtures
- Furniture
- Office Equipment
- Medical Equipment

Options

- **Brake:** 3" diameter models only.
- Unfinished available
- **Locking Pin:** Available on 3" non-brake unfinished models. To order change "PSN" to "PNL" in Model Number.




Wheel Diameter (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Finish Type	Dynamic Load (Pounds)	Base Model # (Add fastening code)	Brake Model # (Add fastening code)	Fastening Selection*
1-9/16" Cosmo	Thread/Plate: 1-13/16" Grip Ring/Grip Neck: 1-11/16"	1-1/16"	Bright Brass	40	PCM40___BB		Threaded: 525 Grip Neck: 302 Plate: 1R
2-1/4" Nova	Threaded: 2-7/16" Grip Ring/Grip Neck: 2-5/16" Plate: 2-5/8"	1-9/16"	Bright Brass	75	PNA22___BB		Threaded: 507, 525, 605, 637, 639, 828 Grip Neck: 302 Grip Ring: 211, 222, 223 Plate: 101, 113
			Bright Chrome	75	PNA22___BC		
			Satin Chrome	75	PNA22___SC		
			Windsor Antique	75	PNA22___WA		
			Unfinished	75	PNA22___UF		
3" Saturn	Thread: 3" Grip Ring/Grip Neck: 2-7/8" Plate: 3-3/16"	2-1/16" Brake: 2-5/16"	Bright Brass	100	PSN30___BB	PSN30___BB-B	Threaded: 512, 525, 526, 545, 605, 637, 639 Grip Neck: 302 Grip Ring: 211, 222, 223 Plate: 101, 113
			Bright Chrome	100	PSN30___BC	PSN30___BC-B	
			Satin Chrome	100	PSN30___SC	PSN30___SC-B	
			Windsor Antique	100	PSN30___WA	PSN30___WA-B	
			Unfinished	100	PSN30___UF	PSN30___UF-B	




*To order, include blue fastener code in Base Model Number. Example: PCM40**525**BB

Threaded Stem


828 — 525 — 545 — 507 — 526 — 512 — 639 — 637 — 605

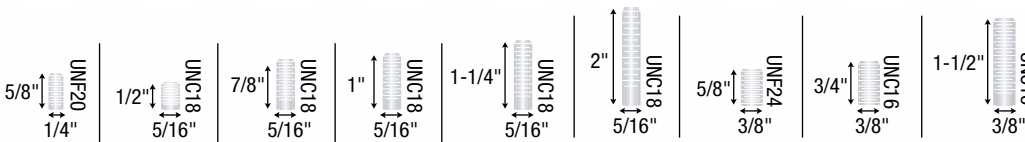

Grip Neck Grip Ring

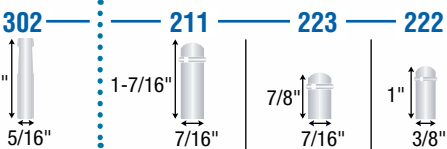

Top Plate

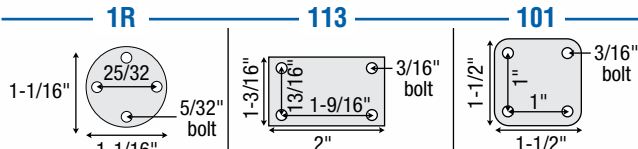

Socket Options

Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages 56-57 for more information.



Note: Unfinished models available