

# Twin-Med Grey



## Features

- Undercover protection
- Designed to protect axle/bearing areas from hair/water
- Wheels feature precision ball bearings for quieter smoother operation
- Softer quieter TPR tread design
- Double ball bearing located in the swivel raceway on 4" models
- 5" models feature a sealed precision bearing in the swivel raceway
- Wheels have easy rollability

## Applications

- Diagnostic Equipment
- Electronic Equipment
- Patient Aids
- Patient Lifts
- Nursing Home Beds
- Medical Carts

## Options


- **Total Lock** models lock both the wheel and swivel
- **Directional Lock** (locks swivel) models are available. Please consult factory.
- **Antistatic** models available; consult factory for details.




| Wheel Diameter (Inches) | Tread Width (Inches) | Mounting Height (Inches)  | Swivel Radius (Inches) | Tread Material | Wheel Bearing  | Dynamic Load (Pounds) | Base Model # (Add fastening code) | Total Lock Brake Model # (Add fastening code) | Fastening Selection*  |
|-------------------------|----------------------|---------------------------|------------------------|----------------|----------------|-----------------------|-----------------------------------|---|---|
| 4"                      | 2-39/64"             | Stem: 5"<br>Plate: 5-3/8" | 3-1/8"                 | TPR            | Precision Ball | 220                   | TG-04TPP-281-SW-____              | TG-04TPP-281-TL-____                          | Threaded: <b>TS07, TS16, TS18</b><br>Plate: <b>TP01, TP11</b> |
| 5"                      | 3"                   | Stem: 6"<br>Plate: 6-3/8" | 4"                     | TPR            | Precision Ball | 246                   | TG-05TPP-281-SW-____              | TG-05TPP-281-TL-____                          |   |

\*To order, include blue fastener code in **Base Model Number**. Example: TG-04TPP-281-SW-**TS07**

### Threaded Stem



### Plate

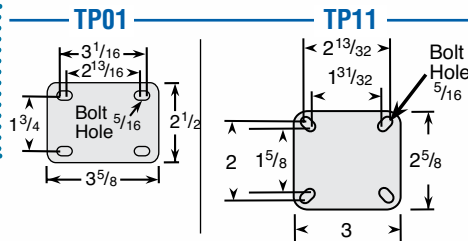

Undercover shield for ultimate protection.

