

Pemco E-Line



Features

- Budget focused, and mass inventoried
- RoHS compliant industrial zinc finish for corrosion resistance
- Variety of the most popular sizes and tread widths
- Five brake options available on both swivel and rigid casters (Total Lock swivel only)
- Double ball raceways for smooth swiveling action
- 1/2" hollow axle with grease zerker and lock nut
- 1/4" thick steel leg construction
- 5/8" nut & bolt kingpin
- Weight capacities up to 1,250 lbs

Applications

- Industrial Equipment
- Material Handling
- Store fixtures
- Carts
- Institutional Equipment

Options

- **Wheel Face Brake**
- **Tread Lock Brake**
- **5" and 7" Cam Brake**
- **Tread Lock Brake**
- Roller bearing is standard, but optional precision ball bearings and Delrin bearings also available. PolyKat requires Precision ball bearing.

Wheel Selection




Floor Protection*	✓+	✓+	✓+	✓+	✓+	✓+	✓	✓	
Non-Marking		✓+	✓+	✓+	✓+	✓+	✓	✓	
Durability	✓	✓	✓	✓+	✓+	✓+	✓+	✓+	✓+
Cushioned Ride	✓+	✓+	✓+	✓	✓	✓	✓	✓	✓+
Chemical Resistance	✓	✓	✓	✓+	✓+	✓+	✓+	✓	✓+

*See page 48 for application details.

Brake Options

All brakes except total lock available on both swivel and rigid casters.

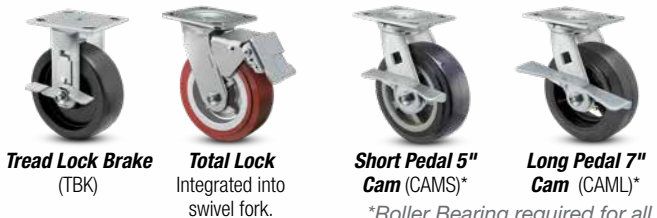


Tread Lock Brake
(TBK)

Total Lock
Integrated into
swivel fork.

**Short Pedal 5"
Cam (CAMS)***

**Long Pedal 7"
Cam (CAML)***

*Roller Bearing required for all CAM brakes. Long Pedal CAM will not work with 4" models.



E-Line continues next page