

# Regent



- Made in the U.S.A.
- RoHS** Environmentally friendly
- NSF** listed

## Features

- Industry leading selection and overall value
- Fast deliveries for any order quantity
- High-strength & heat treated steel for increased durability and caster life
- Dual ball raceways
- RoHS compliant zinc plating for corrosion resistance
- Octagon washer on stem models for easy installation
- NSF approved (less thread guards)

## Applications


- Store fixtures
- Carts
- Institutional Equipment
- Food Service Equipment
- Furniture
- Janitorial Equipment
- Office Equipment
- Racks and Storage Equipment
- Medical Equipment

## Options

- **Brakes:** available on all sizes (see below and product pages for details).
- **Finishes:** Zinc plating standard; optional finishes available (see below).
- **Fastenings & Wheels:** additional fastening sizes and wheel options available. Consult factory.
- **1-5/8" Diameter Models:** see Mighty-Mite on page 38.



## Wheel Selection

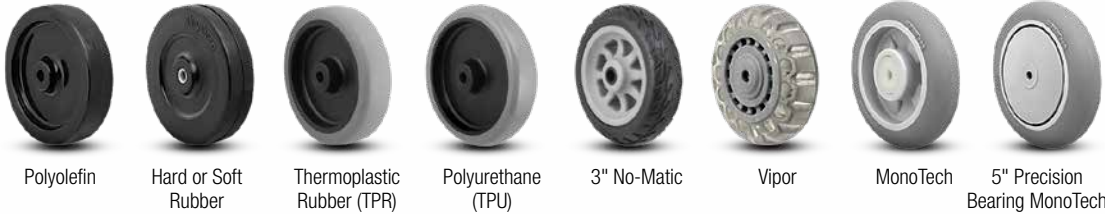

	Polyolefin	Hard or Soft Rubber	Thermoplastic Rubber (TPR)	Polyurethane (TPU)	3" No-Matic	Vipor	MonoTech	5" Precision Bearing MonoTech
Floor Protection*	✓	✓	✓+	✓+	✓+	✓+	✓+	✓+
Non-Marking	✓	✓	✓+	✓+	✓+	✓+	✓+	✓+
Durability	✓+	✓	✓	✓+	✓	✓+	✓+	✓+
Cushioned Ride		✓+(soft)	✓	✓	✓+	✓	✓+	✓+
Chemical Resistance	✓+	✓	✓	✓+	✓	✓+	✓+	✓+

\*See page 48 for application details.

## Brake Selection



**Side Brakes** for 2", 2-1/2" and 3" models. Add **[B]** at end of model.



**Top Lock Brakes** 3" and 4" diameter models. Add **[TL]** at end of model. Not compatible with top plate models.



**Tread Lock Brakes** 4" and 5" models. Add **[B]** at end of model.



**Side Brakes** 4" and 5" models. Add **[SB]** at end of model.

## Finish Options

Replace standard Zinc **[ZN]** in Part Number with appropriate finish code. Minimum order quantities may apply.



## Socket Options

Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages 56-57 for more information.



Connects casters to wood



Connects casters to round tubes



Connects casters to square tubes



Weldable caster mount



Metal T nut



Connect casters to PVC pipe legs



Connect casters to threaded pipes



Corner brackets

Regent continues next page



Continued from previous page


## Stem Models

Plate Models on Next Page


Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Dynamic Load (Pounds)	Base Model Number (Add fastening code)	Fastening Selection*
2"	13/16"	2-5/8"	1-15/16" Side Brake: 2-1/8"	Soft Rubber	80	PRE20___ZN-3R	<b>Threaded: 532, 507, 500, 637, 605, 634</b> <b>Grip Neck: 302</b> <b>Grip Ring: 223, 211, 222, 273</b>
				Thermoplastic Rubber	80	PRE20___ZN-TPR	
				Hard Rubber	90	PRE20___ZN-3H	
				Polyurethane	90	PRE20___ZN-TPU	
				Solid Wall Polyolefin	90	PRE20___ZN-3ES	
				Polyolefin	90	PRE20___ZN-3E	
				Vipor	90	PRE20___ZN-VPR01(CG)	
2-1/2"	13/16"	3-1/8"	Swivel & Side Brake: 2-1/8"	Soft Rubber	80	PRE25___ZN-3R	<b>Threaded: 532, 507, 500, 637, 634, 605</b> <b>Grip Neck: 302</b> <b>Grip Ring: 223, 211, 222, 273</b>
				Thermoplastic Rubber	80	PRE25___ZN-TPR	
				Hard Rubber	95	PRE25___ZN-3H	
				Polyurethane	95	PRE25___ZN-TPU	
				Polyolefin	95	PRE25___ZN-3E	
3"	13/16"	3-1/2"	Swivel and Side Brake: 2-1/2" Top Lock Brake: 3-5/16"	Soft Rubber	110	PRE30___ZN-3R	<b>Threaded: 532, 507, 500, 637, 634, 605, 748</b> <b>Grip Neck: 302</b> <b>Grip Ring: 223, 211, 222, 273</b>
				Thermoplastic Rubber	110	PRE30___ZN-TPR	
				No-Matic	110	PRE30___ZN-NOM	
				Hard Rubber	120	PRE30___ZN-3H	
				Polyurethane	120	PRE30___ZN-TPU	
				Polyolefin	120	PRE30___ZN-3E	
				MonoTech	120	PRE30___ZN-MNT	
				Vipor	120	PRE30___ZN-VPR01(CG)	
4"	15/16"	4-3/4"	3-7/16" Side Brake: 3-1/2" Top Lock Brake: 4-1/16"	Soft Rubber	125	PRE40___ZN-3R	<b>Threaded: 605, 741, 748, 705, 800, 806</b> <b>Grip Ring: 211, 273, 204</b> <b>Expanding Adapter: 440-455</b>
				Thermoplastic Rubber	125	PRE40___ZN-TPR	
				Hard Rubber	150	PRE40___ZN-3H	
				Polyurethane	150	PRE40___ZN-TPU	
				Polyolefin	150	PRE40___ZN-3E	
				MonoTech	150	PRE40___ZN-MNT	
				Vipor	120	PRE40___ZN-VPR01(CG)	
5"	15/16"	5-3/4"	Swivel & Brake: 4-1/8"	Soft Rubber	130	PRE50___ZN-3R	<b>Threaded: 605, 741, 748, 705, 800, 806</b> <b>Grip Ring: 211, 273, 204</b> <b>Expanding Adapter: 440-455</b>
				Thermoplastic Rubber	130	PRE50___ZN-TPR	
				Hard Rubber	150	PRE50___ZN-3H	
				Polyurethane	150	PRE50___ZN-TPU	
				Polyolefin	150	PRE50___ZN-3E	
				MonoTech	160	PRE50___ZN-MNT	
				MonoTech Precision Bearing	160	PRE50___ZN-MNT33(GG)	

\*To order, include blue fastener code in **Base Model Number**. Example: PRE40**605**ZN-3R ▲


### Threaded Stem

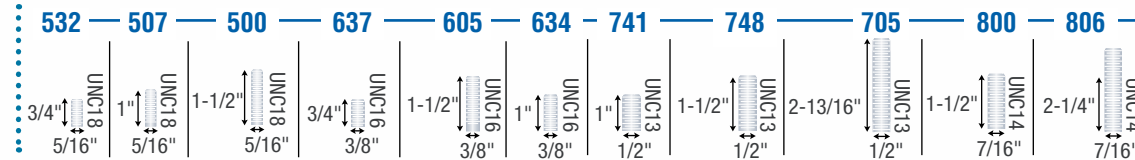

### Grip Neck Grip Ring Stem

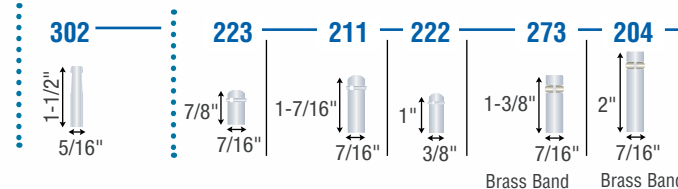

### Expanding Adapter Stem

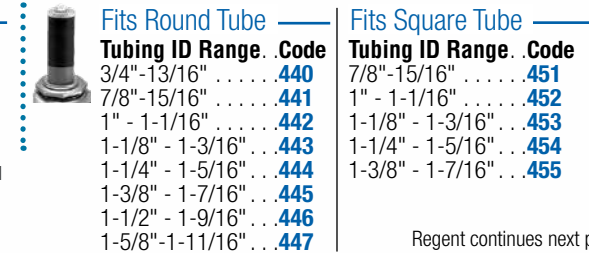

Regent continues next page



**Side Brakes** for 2", 2-1/2" and 3" models. Add **[B]** at end of model.



**Top Lock Brakes** 3" and 4" diameter models. Add **[TL]** at end of model.



**Tread Lock Brakes** 4" and 5" models. Add **[B]** at end of model.



**Side Brakes** 4" and 5" models. Add **[SB]** at end of model.

# Regent

Continued from previous page



Swivel Top Plate



Rigid Top Plate

## Top Plate Models


Stem Models on Previous Page

Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Dynamic Load (Pounds)	Swivel Base Model Number (Add fastener code)	Rigid Base Model Number	Fastening Selection*
2"	13/16"	2-5/8"	1-15/16" Side Brake: 2-1/8"	Soft Rubber	80	PRE20___ZN-3R		<b>Swivel:</b> 113, 108
				Thermoplastic Rubber	80	PRE20___ZN-TPR		
				Hard Rubber	90	PRE20___ZN-3H		
				Polyurethane	90	PRE20___ZN-TPU		
				Solid Wall Polyolefin	90	PRE20___ZN-3ES		
				Polyolefin	90	PRE20___ZN-3E		
				Vipor	90	PRE20___ZN-VPR01(CG)		
2-1/2"	13/16"	3-1/8"	Swivel & Side Brake: 2-1/8"	Soft Rubber	80	PRE25___ZN-3R		<b>Swivel:</b> 113, 108
				Thermoplastic Rubber	80	PRE25___ZN-TPR		
				Hard Rubber	95	PRE25___ZN-3H		
				Polyurethane	95	PRE25___ZN-TPU		
				Polyolefin	95	PRE25___ZN-3E		
3"	13/16"	3-1/2"	Swivel and Side Brake: 2-1/2" Top Lock Brake: 3-5/16"	Soft Rubber	110	PRE30___ZN-3R	PRI30120ZN-3R	<b>Swivel:</b> 113, 108, 120 <b>Rigid:</b> 120
				Thermoplastic Rubber	110	PRE30___ZN-TPR	PRI30120ZN-TPR	
				No-Matic	110	PRE30___ZN-NOM	PRI30120ZN-NOM	
				Hard Rubber	120	PRE30___ZN-3H	PRI30120ZN-3H	
				Polyurethane	120	PRE30___ZN-TPU	PRI30120ZN-TPU	
				Polyolefin	120	PRE30___ZN-3E	PRI30120ZN-3E	
				MonoTech	120	PRE30___ZN-MNT	PRI30120ZN-MNT	
				Vipor	120	PRE30___ZN-VPR01(CG)	PRI30120ZN-VPR01(CG)	
4"	15/16"	4-7/8"	3-7/16" Side Brake : 3-1/2" Top Lock Brake: 4-1/16"	Soft Rubber	125	PRE40___ZN-3R	PRI40120ZN-3R	<b>Swivel:</b> 120 <b>Rigid:</b> 120
				Thermoplastic Rubber	125	PRE40___ZN-TPR	PRI40120ZN-TPR	
				Hard Rubber	150	PRE40___ZN-3H	PRI40120ZN-3H	
				Polyurethane	150	PRE40___ZN-TPU	PRI40120ZN-TPU	
				Polyolefin	150	PRE40___ZN-3E	PRI40120ZN-3E	
				MonoTech	150	PRE40___ZN-MNT	PRI40120ZN-MNT	
				Vipor	120	PRE40___ZN-VPR01(CG)	PRI40120ZN-VPR01(CG)	
5"	15/16"	5-7/8"	Swivel & Side Brake: 4-1/8"	Soft Rubber	130	PRE50___ZN-3R	PRI50120ZN-3R	<b>Swivel:</b> 120 <b>Rigid:</b> 120
				Thermoplastic Rubber	130	PRE50___ZN-TPR	PRI50120ZN-TPR	
				Hard Rubber	150	PRE50___ZN-3H	PRI50120ZN-3H	
				Polyurethane	150	PRE50___ZN-TPU	PRI50120ZN-TPU	
				Polyolefin	150	PRE50___ZN-3E	PRI50120ZN-3E	
				MonoTech	160	PRE50___ZN-MNT	PRI50120ZN-MNT	
				MonoTech Precision Bearing	160	PRE50___ZN-MNT33(GG)	PRI50120ZN-MNT33(GG)	

\*To order, include blue fastener code in Base Model Number. Example: PRE30113ZN-3R


### Swivel Top Plate

113




Note: 113 plate is not NSF listed for food service industry.

108




120



### Rigid Top Plate

120



**Side Brakes** for 2", 2-1/2" and 3" models. Add [B] at end of model.



**Tread Lock Brakes** 4" and 5" models. Add [B] at end of model.



**Side Brakes** 4" and 5" models. Add [SB] at end of model.



# Monarch Hooded Casters

## Features

- Extended hood helps prevent pinch points and material entanglement
- Zinc finish
- Double ball bearing raceways
- Octagon washer on threaded stem for easy installation
- Heat treated

## Applications


- Fixtures
- Institutional Equipment
- Equipment Carts
- Furniture
- Mechanical Creepers
- Seating
- Medical Equipment

## Options

- **Finishes:** Zinc plating standard; optional finishes available by special order. Consult factory for details.
- **Fastenings:** Others sizes available by special order; consult factory.



## Wheel Selection

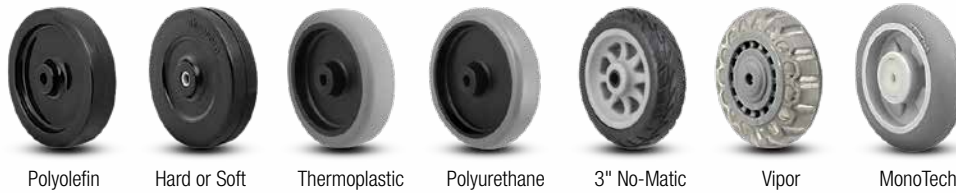

	Polyolefin	Hard or Soft Rubber	Thermoplastic Rubber	Polyurethane Tread	3" No-Matic	Viper	MonoTech
Floor Protection <sup>1</sup>	✓	✓	✓+	✓+	✓+	✓+	✓+
Non-Marking	✓	✓	✓	✓	✓	✓	✓
Durability	✓+	✓	✓	✓+	✓	✓+	✓+
Cushioned Ride		✓+(soft)	✓	✓	✓+	✓	✓+
Chemical Resistance	✓+	✓	✓	✓+	✓	✓+	✓+

<sup>1</sup>See page 48 for application details.

Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Dynamic Load (Pounds)	Base Model Number (Add fastening code)	Fastening Selection <sup>2</sup>					
2"	13/16"	2-5/8"	2-1/16"	Soft Rubber	80	PMN20___ZN-3R	<b>Threaded: 507, 605</b> <b>Grip Ring: 223, 211</b> <b>Grip Neck: 302</b> <b>Plate: 113, 108</b>					
				TPR	80	PMN20___ZN-TPR						
				Hard Rubber	90	PMN20___ZN-3H						
				Polyurethane	90	PMN20___ZN-TPU						
				Solid Wall Polyolefin	90	PMN20___ZN-3ES						
				Polyolefin	90	PMN20___ZN-3E						
				Viper	90	PMN20___ZN-VPR01(CG)						
2-1/2"	13/16"	3-1/8"	2-1/8"	Soft Rubber	80	PMN25___ZN-3R	<b>Threaded: 507, 605</b> <b>Grip Ring: 223, 211</b> <b>Plate: 113, 108</b>					
				TPR	80	PMN25___ZN-TPR						
				Hard Rubber	95	PMN25___ZN-3H						
				Polyurethane	95	PMN25___ZN-TPU						
				Polyolefin	95	PMN25___ZN-3E						
				3"	13/16"	3-1/2"		2-1/2"	Soft Rubber	110	PMN30___ZN-3R	<b>Threaded: 507, 605</b> <b>Grip Ring: 223, 211</b> <b>Plate: 113, 108</b>
									TPR	110	PMN30___ZN-TPR	
No-Matic	110	PMN30___ZN-NOM										
Hard Rubber	120	PMN30___ZN-3H										
Polyurethane	120	PMN30___ZN-TPU										
Polyolefin	120	PMN30___ZN-3E										
MonoTech	120	PMN30___ZN-MMNT										
Viper	120	PMN30___ZN-VPR01(CG)										




## Socket Options

Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages 56-57 for more information.



<sup>2</sup>To order, include blue fastener code in **Base Model Number**. Example: PMN20**605**ZN-3R

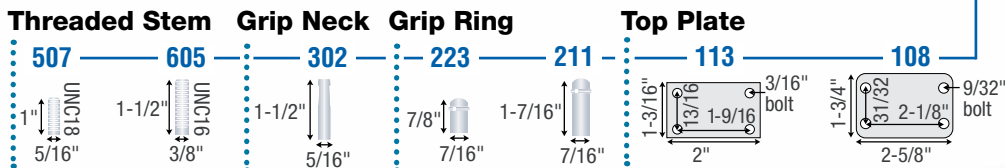



# Institutional Series



**RoHS**  
Environmentally friendly

**NSF** listed

## Features

- Constructed of high-strength steel for added durability
- Raceway dust cap for increased caster life and performance
- NSF approved (less thread guards)
- Dual ball bearing raceway
- Durable zinc finish
- 3/8" diameter nut and bolt axle
- Full and partial thread guard options help prevent debris from entangling wheel

## Applications

- Store Fixtures
- Storage Equipment
- Utility Carts
- Institutional Equipment
- Office Equipment
- Food Service
- Material Handling Equipment
- Hospitality Carts

## Options

- **Brakes:** various brakes available on all sizes (see below and product pages for details).
- **Finishes:** Zinc plating standard; optional finishes available. Consult factory.
- **Fastenings & Wheels:** additional fastening sizes and wheel options available. Consult factory.

## Wheel Selection



All sizes/colors now available with Full or Partial thread guards.

Floor Protection*	✓	✓	✓+	✓+	✓+	✓+	✓+	✓+	✓+
Non-Marking	✓	✓	✓+	✓+	✓+	✓+	✓+	✓+	
Durability	✓+	✓	✓+	✓	✓+	✓+	✓+	✓	✓
Cushioned Ride		✓+(soft)	✓+	✓	✓	✓	✓	✓+	✓+
Chemical Resistance	✓+	✓	✓+	✓	✓	✓	✓	✓	✓

\*See page 48 for application details.

## MonoTech Facts

1. Provides ultimate floor protection and a quiet, cushioned ride.
2. Rolls over obstacles with ease.
3. Will not flat spot and is excellent on any floor type.
4. Rejects floor debris, including metal shavings and glass.
5. **USA Made.**



Conductive wheels now available! Consult factory.

### Top Lock Brake

Available on all sizes and fastenings.

## Brake Selection

### Tread Lock Brake

Side access tread lock. Available on all sizes and fastenings.



### Total Lock Brake

Locks both swivel and wheel. Available on all sizes and fastenings.



### Direction Lock Brake

Locks swivel only for easy tracking. Available on 5" wheel diameter plate models only.



### Top Lock Brake

Easy access tread lock. Available on 3", 3-1/2", 4" and 5" wheel diameter models.



## Socket Options

Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages 56-57 for more information.



Connects casters to wood



Connects casters to round tubes



Connect casters to PVC pipe legs



Connects casters to square tubes



Connect casters to threaded pipes



Corner brackets



Weldable caster mount

# Institutional Series

Continued from previous page



5" and 6" Models Continue on Next Page

Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Bearing Type	Thread Guard Type	Dynamic Load (Pounds)	Base Model Number (Add fastening code)	Fastening Selection*		
3"	1-1/4"	Stem: 4-1/8" Plate: 4-1/4"	Swivel & Tread Lock Brake: 2-7/8"	Soft Rubber	Plain	None	150	PGS30___ZN-SFR01(KK)	<b>Threaded: 741, 748, 705</b> <b>Grip Ring: 291, 273</b> <b>Expanding Adapter: 440-455</b> <b>Hollow Kingpin: 400</b> <b>Plate: 120, 149, 162</b>		
				Hard Rubber	Plain	None	210	PGS30___ZN-HDR01(KK)			
				TPR	Precision	Full	210	PGS30___ZN-TPR33(GG)			
				TPR	Delrin	None	210	PGS30___ZN-TPR11(GG)			
				Polyolefin	Plain	None	250	PGS30___ZN-POD01(KK)			
		Top Lock/Total Lock Brake: 4-3/8"	TPU (Blue)	Precision	Full	250	PGS30___ZN-TPU33(BG)				
			TPU (Grey)	Precision	Full	250	PGS30___ZN-TPU33(GG)				
			Stem: 4-5/8" Plate: 4-3/4"	Swivel & Tread Lock Brake: 3"	Soft Rubber	Plain	None	150		PGS35___ZN-SFR01(KK)	<b>Threaded: 741, 748, 705</b> <b>Grip Ring: 291, 273</b> <b>Exp Adap.: 440-455</b> <b>Hollow Kingpin: 400</b> <b>Plate: 120, 149, 162</b>
					Hard Rubber	Plain	None	250		PGS35___ZN-HDR01(KK)	
					TPR	Delrin	None	250		PGS35___ZN-TPR11(GG)	
TPR	Ball	Partial			250	PGS35___ZN-TPR22(GG)					
MonoTech (Flat)	Precision	Partial			250	PGS35___ZN-FMT32(GG)					
Top Lock/Total Lock Brake: 4-3/8"	MonoTech (Flat)	Delrin		None	250	PGS35___ZN-FMT11(GG)					
	Urethane (Blue)	Ball		Partial	275	PGS35___ZN-TPU22(BG)					
	Urethane (Grey)	Ball		Partial	275	PGS35___ZN-TPU22(GG)					
	Stem: 5-1/8" Plate: 5-1/4"	Standard Swivel & Tread Lock Brake: 3-3/8"		Soft Rubber	Plain	None	165	PGS40___ZN-SFR01(KK)	<b>Threaded: 741, 748, 705</b> <b>Grip Ring: 291, 273</b> <b>Expanding Adapter: 440-455</b> <b>Hollow Kingpin: 400</b> <b>Plate: 120, 149, 162</b>		
				MonoTech (Donut)	Precision	Partial	250	PGS40___ZN-DMT32(GG)			
MonoTech (Donut)			Delrin	None	250	PGS40___ZN-DMT11(GG)					
Hard Rubber			Plain	None	255	PGS40___ZN-HDR01(KK)					
TPR			Precision	Full	260	PGS40___ZN-TPR33(GG)					
TPR			Precision	Partial	260	PGS40___ZN-TPR32(GG)					
TPR			Delrin	None	260	PGS40___ZN-TPR11(GG)					
Polyolefin			Plain	None	275	PGS40___ZN-POD01(KK)					
MonoTech (Flat)			Precision	Partial	300	PGS40___ZN-FMT32(GG)					
MonoTech (Flat)			Delrin	None	300	PGS40___ZN-FMT11(GG)					
Top Lock/Total Lock Brake: 4-3/8"	TPU (Blue)	Precision	Full	300	PGS40___ZN-TPU33(BG)						
	TPU (Blue)	Precision	Partial	300	PGS40___ZN-TPU32(BG)						
	TPU (Grey)	Precision	Full	300	PGS40___ZN-TPU33(GG)						
	TPU (Grey)	Precision	Partial	300	PGS40___ZN-TPU32(GG)						



Tread lock brake add [TB] at end of model.




Top lock brake add [TL] at end of model.




Total lock brake (all models) change 3rd digit to "T". Example: PGT40741ZN-DMT32(GG).

\*To order, include blue fastener code in Base Model Number. Example: PGS30**741**ZN-SFR01(KK) ▲


### Threaded Stem

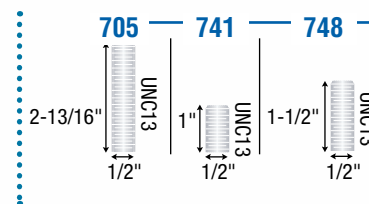


### Grip Ring Stem



### Expanding Adapter Stem

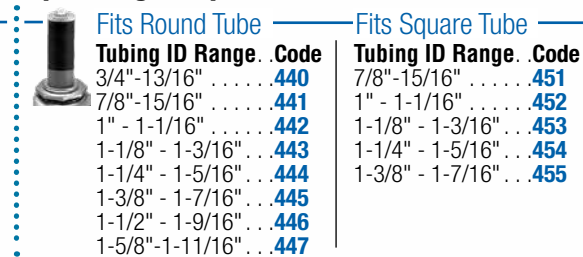

### Top Plate

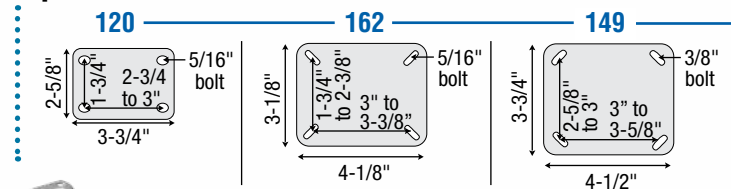

### Hollow Kingpin



Note: The following brakes are not available for the 162 and 149 plates: Top Lock, Total Lock, and Direction Lock Brakes.



Rigid plate: change 3rd digit to "R". Example: PGR40120ZN-FMT32(GG).

# Institutional Series

Continued from previous page



3" to 4" Models on Previous Page

Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Bearing Type	Thread Guard Type	Dynamic Load (Pounds)	Base Model Number (Add fastener code)	Fastening Selection*
5"	1-1/4"	Stem: 6-1/8" Plate: 6-1/4"	Swivel & Tread Lock Brake: 3-7/8" Top Lock/Direction/Total Lock Brake: 4-3/8"	Soft Rubber	Plain	None	200	PGS50...ZN-SFR01(KK)	<b>Threaded: 741, 748, 705</b> <b>Grip Ring: 291, 273</b> <b>Expanding Adapter: 440-455</b> <b>Hollow Kingpin: 400</b> <b>Plate: 120, 149, 162, 195</b>
				Hard Rubber	Plain	None	280	PGS50...ZN-HDR01(KK)	
				TPR	Precision	Full	280	PGS50...ZN-TPR33(GG)	
				TPR	Precision	Partial	280	PGS50...ZN-TPR32(GG)	
				TPR	Delrin	None	280	PGS50...ZN-TPR11(GG)	
				Polyolefin	Plain	None	300	PGS50...ZN-POD01(KK)	
				MonoTech (Donut)	Precision	Partial	300	PGS50...ZN-DMT32(GG)	
				MonoTech (Donut)	Delrin	None	300	PGS50...ZN-DMT11(GG)	
				TPU (Blue)	Precision	Full	315	PGS50...ZN-TPU33(BG)	
				TPU (Blue)	Precision	Partial	315	PGS50...ZN-TPU32(BG)	
				TPU (Grey)	Precision	Full	315	PGS50...ZN-TPU33(GG)	
				TPU (Grey)	Precision	Partial	315	PGS50...ZN-TPU32(GG)	
				MonoTech (Flat)	Precision	Partial	325	PGS50...ZN-FMT32(GG)	
				MonoTech (Flat)	Delrin	None	325	PGS50...ZN-FMT11(GG)	
				Pneumatic (Black)	Ball	None	150	PGS60...ZN-PNU21(KG)	
				No-Matic (Black)	Ball	None	150	PGS60...ZN-NOM21(KG)	
6"	1-1/4"	Stem: 7-1/8" Plate: 7-1/4"	Swivel & Tread Lock Brake: 4-1/2" Top Lock/Total Lock Brake: 4-3/8"	TPR	Precision	Full	300	PGS60...ZN-TPR33(GG)	<b>Threaded: 741, 748</b> <b>Grip Ring: 273</b> <b>Expanding Adapter: 440-455</b> <b>Hollow Kingpin: 400</b> <b>Plate: 120</b>
				TPR	Precision	Partial	300	PGS60...ZN-TPR32(GG)	
				TPU (Grey)	Precision	Full	325	PGS60...ZN-TPU33(GG)	
				TPU (Grey)	Precision	Partial	325	PGS60...ZN-TPU32(GG)	
				Vipor	Ball	None	300	PGS60...ZN-VPR21(GG)	
				MonoTech (Donut)	Precision	Partial	325	PGS60...ZN-DMT32(GG)	
				MonoTech (Donut)	Delrin	None	325	PGS60...ZN-DMT11(GG)	

\*To order, include blue fastener code in **Base Model Number**. Example: PGS50**741**ZN-SFR01(KK) ▲



**Total lock brake add [TB]** at end of model.



**Top lock brake add [TL]** at end of model.




**Total lock brake** (all models) change 3rd digit to "T." Example: PGT50741ZN-DMT32(GG).




**Direction lock brake** (5" plate models) change 3rd digit to "D" Example: PGD50120ZN-TPU33(BG).


## Threaded Stem

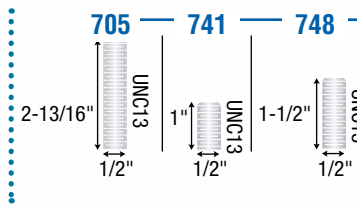


## Grip Ring Stem



## Expanding Adapter Stem

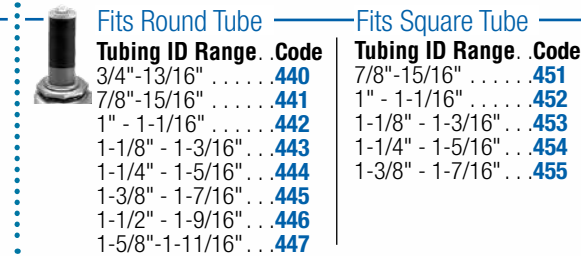

## Top Plate

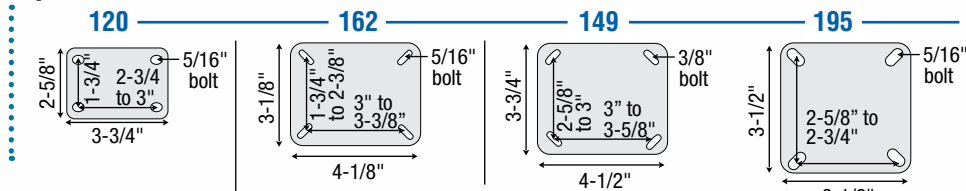

**Note:** The following brakes are not available for the 162, 149, and 195 plates: Top Lock, Total Lock, and Direction Lock Brakes.

## Hollow Kingpin



**Rigid plate:** change 3rd digit to "R." Example: PGR50120ZN-FMT32(GG).

# General Duty

## Features

- Economical mobility solution
- Zinc finish
- RoHS Compliant
- Single race
- Nut and bolt axle
- Nickel plated kingpin for smooth swivel

## Applications

- Store Fixtures
- Furniture
- Material Handling
- Institutional Equipment
- Industrial Equipment

## Options

- Brake: available on all swivel models (excludes steel wheel tread types). Add **[B]** to end of model number.

**RoHS**  
Environmentally friendly

**NSF** listed



## Wheel Selection



Soft Rubber (Black)



Hard Rubber (Dark Grey)



Polyolefin

Wheel Diameter (Inches)	Tread Width (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Tread Type	Dynamic Load (Pounds)	Swivel Top Plate Model Number	Rigid Top Plate Model Number	Fastening Selection <small>See page 60-62 for General Duty plate drawings.</small>
2"	13/16"	2-1/2"	1-13/16" Brake: 2-1/8"	Soft Rubber (Black)	90	PSQ20112ZN-3R	PRQ20122ZN-3R	<b>112 Swivel:</b> 1-7/8" x 2-9/16" <b>122 Rigid:</b> 1-1/2" x 2-21/32" <b>Bolt Spacing:</b> (15/16" x 2-1/8") <b>1/4" Bolt</b>
				Polyolefin	125	PSQ20112ZN-3E	PRQ20122ZN-3E	
				Hard Rubber (Dark Grey)	125	PSQ20112ZN-3H	PRQ20122ZN-3H	
2-1/2"	1-1/8"	3-1/4"	2-1/4" Brake: 2-3/4"	Soft Rubber (Black)	100	PSQ25115ZN-3R	PRQ25123ZN-3R	<b>115 Swivel:</b> 2-3/4" x 3-7/8" <b>Bolt Spacing:</b> (1-3/4" x 3") <b>123 Rigid:</b> 2-1/8" x 4-3/8" <b>Bolt Spacing:</b> (1-1/16" x 3-1/2") <b>5/16" Bolt</b>
				Polyolefin	175	PSQ25115ZN-3E	PRQ25123ZN-3E	
				Hard Rubber (Dark Grey)	175	PSQ25115ZN-3H	PRQ25123ZN-3H	
3"	1-1/4"	3-13/16"	2-5/8" Brake: 3-1/4"	Soft Rubber (Black)	150	PSQ30119ZN-3R	PRQ30124ZN-3R	<b>119 Swivel:</b> 3-1/8" x 4-1/8" <b>Bolt Spacing:</b> (2-3/8" x 3-3/8" to 3-7/16") <b>124 Rigid:</b> 2-5/16" x 4-7/8" <b>Bolt Spacing:</b> (1-3/16" x 4") <b>5/16" Bolt</b>
				Polyolefin	210	PSQ30119ZN-3E	PRQ30124ZN-3E	
				Hard Rubber (Dark Grey)	225	PSQ30119ZN-3H	PRQ30124ZN-3H	
4"	1-3/8"	5"	3-7/16" Brake: 3-9/16"	Soft Rubber (Black)	200	PSQ40121ZN-3R	PRQ40125ZN-3R	<b>121 Swivel:</b> 4" x 5-1/8" <b>Bolt Spacing:</b> (3" x 4") <b>125 Rigid:</b> 3-1/16" x 6-1/8" <b>Bolt Spacing:</b> (1-3/4" x 5") <b>3/8" Bolt</b>
				Polyolefin	250	PSQ40121ZN-3E	PRQ40125ZN-3E	
				Hard Rubber (Dark Grey)	300	PSQ40121ZN-3H	PRQ40125ZN-3H	



**Friction Brake**  
Available on swivel models except steel wheel. Add **[B]** at end of model.