

Ball Metal Tread



Features

- Industry leading selection and overall value
- Fast deliveries for any order quantity
- Self-lubricating acetyl resin bearing
- No exposed axle

Applications

- Store Fixtures
- Furniture
- Office Equipment
- Medical Equipment

Options


- Brake 2-1/2" diameter models.
- Tred-Gard® cover protects tread from scratches during manufacturing and shipping. To order add [-T] to end of Part Number. Available for 2" and 2-1/2" models. For field installable Tred-Gards order 001391 for 2" and 001550 for

2" and **001550** for 2-1/2" models.

Wheel Diameter (Inches)	Mounting Height (Inches)	Swivel Radius (Inches)	Finish Type	Dynamic Load (Pounds)	Base Model # (Add fastening code)	Brake Model # (Add fastening code)	Fastening Selection*
1-1/2" Starlet	Thread/Plate: 1-13/16" Grip Ring/Grip Neck: 1-5/8"	1-3/16"	Bright Brass	40	PST15BB		Threaded: 525 Grip Neck: 302 Plate: 1R
			Bright Chrome	40	PST15BC		
			Windsor Antique	40	PST15WA		
2" Satellite	Thread: 2-5/16" Grip Ring/Grip Neck: 2-3/16" Plate: 2-1/2"	1-1/2"	Bright Brass	75	PSE20BB		Threaded: 507, 525, 605, 637, 639, 828 Grip Neck: 302 Grip Ring: 211, 222, 223 Plate: 101, 113
			Bright Chrome	75	PSE20BC		
			Satin Chrome	75	PSE20SC		
			Windsor Antique	75	PSE20WA		
2-1/2" Planet	Thread: 2-13/16" Grip Ring/Grip Neck: 2-11/16" Plate: 3"	1-7/8"	Bright Brass	100	PPL25BB	PPL25BB-B	Threaded: 512, 525, 526, 545, 605, 637, 639 Grip Neck: 302 Grip Ring: 211, 222, 223 Plate: 101, 113
			Bright Chrome	100	PPL25BC	PPL25BC-B	
		Brake: 2-5/16"	Satin Chrome	100	PPL25SC	PPL25SC-B	
			Windsor Antique	100	PPL25WA	PPL25WA-B	





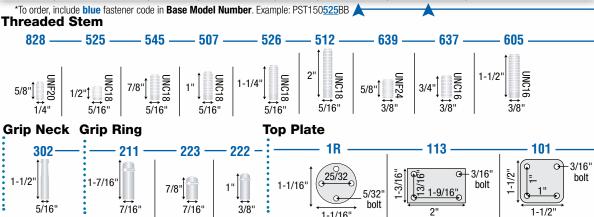









Note: Unfinished models available

Socket Options

Shepherd has many solutions to help you mount your casters to your equipment quickly and easily. See pages 56-57 for more information.









