



+ For swivel models add "S", for rigid model add "R" to end of base caster number.

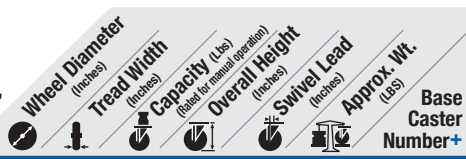


**Polyurethane on Aluminum Flat Tread (29 Pedestal Precision)\***


Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
PD 	4	1 1/2	600	5 5/8	1 11/16	5 1/2	18PD04129
	4	2	700	5 5/8	1 11/16	6	18PD04229
	5	1 1/2	720	6 1/2	1 5/8	6	18PD05129
	5	2	1050	6 1/2	1 5/8	6 1/4	18PD05229
	6	2	1230	7 1/2	1 3/4	6 3/4	18PD06229
	8	2	1250	9 1/2	1 3/4	8	18PD08229

\*Precision Ball (28) Bearings available. Change "29" to other bearing code. Precision Ball example: 18PD04228.


**Aubin Industries Swivel-EAZ® Crown Tread (28 Precision Ball Bearing)**

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
EY 	4	2	675	5 5/8	1 11/16		18EY05228
	5	2	900	6 1/2	1 5/8		18EY05228
	6	2	1250	7 1/2	1 3/4		18EY06228
	8	2	1250	9 1/2	1 3/4		18EY08228

**Aubin Industries Swivel-EAZ® Flat Tread (28 Precision Ball Bearing)**


Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
EZ 	4	2	900	5 5/8	1 11/16		18EZ05228
	5	2	1250	6 1/2	1 5/8		18EZ05228
	6	2	1250	7 1/2	1 3/4		18EZ06228
	8	2	1250	9 1/2	1 3/4		18EZ08228

**Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)**

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
AX 	4	2	800	5 5/8	1 11/16	5 1/2	18AX04228
	5	2	1000	6 1/2	1 5/8	6	18AX05228
	6	2	1250	7 1/2	1 3/4	7	18AX06228
	8	2	1250	9 1/2	1 3/4	9	18AX08228


85 Shore A

**Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)**

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
PM 	5	2	1000	6 1/2	1 5/8	6	18PM05228
	6	2	1250	7 1/2	1 3/4	7	18PM06228
	8	2	1250	9 1/2	1 3/4	9	18PM08228

95 Shore A


**Polyurethane on Aluminum Round Tread (28 Precision Ball Bearing)**

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
PM 80A 	5	2	1000	6 1/2	1 5/8	6	18PM0522880A
	6	2	1250	7 1/2	1 3/4	7	18PM0622880A
	8	2	1250	9 1/2	1 3/4	9	18PM0822880A

80 Shore A


To Specify Rigid or Swivel, insert "R" or "S" before "80A". Example: 18PM06228R80A.

**Polyurethane on Polypropylene (29 Pedestal Precision)\***

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
XA 	4	2	700	5 5/8	1 11/16	5 1/4	18XA04229
	5	2	750	6 1/2	1 5/8	5 3/4	18XA05229
	6	2	900	7 1/2	1 3/4	6 1/2	18XA06229
	8	2	1000	9 1/2	1 3/4	8 1/2	18XA08229


Prevenz™ antimicrobial models available. Add PREV to end of caster number. \*Precision Ball (28) bearings available. Change "29" to other bearing code. Precision Ball example: 18XA04228.

**X-Treme™ Solid Polyurethane (29 Pedestal Precision)\***


Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
XI 	4	2	1000	5 5/8	1 11/16	6	18XI04229
	5	2	1000	6 1/2	1 5/8	6 1/2	18XI05229
	6	2	1000	7 1/2	1 3/4	7 1/4	18XI06229
	8	2	1000	9 1/2	1 3/4	9	18XI08229

\*Precision Ball (28) bearings available. Change "29" to other bearing code. Precision Ball example: 18XI04228.

+ For swivel models add "S", for rigid model add "R" to end of base caster number.

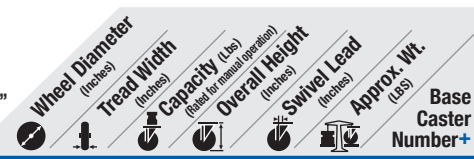


**X-Treme™ Plus Solid Polyurethane (29 Pedestal Precision)\***

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
XP 	4	2	1250	5 5/8	1 11/16	6	18XP04229
	5	2	1200	6 1/2	1 5/8	6 1/2	18XP05229
	6	2	1250	7 1/2	1 3/4	7 1/4	18XP06229
	8	2	1200	9 1/2	1 3/4	9	18XP08229


\*Precision Ball (28) bearings available. Change "29" to other bearing code. Precision Ball example: 18XP04228.

**Solid Elastomer (28 Precision Ball Bearing)\***

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
SE 	4	2	1000	5 5/8	1 11/16	6	18SE04228
	5	2	1000	6 1/2	1 5/8	6 1/2	18SE05228
	6	2	1100	7 1/2	1 3/4	7 1/4	18SE06228
	8	2	1200	9 1/2	1 3/4	9	18SE08228


\*Delrin (51) bearings available. Change "28" to other bearing code. Delrin example: 18SE04251.

**Maxim® (29 Pedestal Precision Bearing)\***

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
NG 	3 1/4	2	800	5 1/4	1 11/16	6	18NG03229
	4	2	800	5 5/8	1 11/16	6	18NG04229
	5	2	1000	6 1/2	1 5/8	6 1/2	18NG05229
	6	2	1200	7 1/2	1 3/4	7 1/4	18NG06229
8	2	1250	9 1/2	1 3/4	9	18NG08229	


Prevenz™ antimicrobial models available. Add PREV to end of caster number. \*Precision Ball (28) bearings available. Change "29" to other bearing code. Precision Ball example: 18NG04228.

**White Nylon (29 Pedestal Precision Bearing)\***


Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
NW 	5	2	600	6 1/2	1 5/8	6 1/2	18NW05229
	6	2	900	7 1/2	1 3/4	7 1/4	18NW06229
	8	2	1100	9 1/2	1 3/4	9	18NW08229

\*Delrin (51) bearings available. Change "29" to other bearing code. Delrin example: 18NW04251.

**Heavy Duty Glass Filled Nylon (28 Precision Ball Bearing)**

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
DT 	4	2	800	5 5/8	1 11/16		18DT04228
	5	2	1000	6 1/2	1 5/8		18DT05228
	6	2	1200	7 1/2	1 3/4		18DT06228
	8	2	1250	9 1/2	1 3/4		18DT08228

**Trionix™ High Impact Polymer (28 Precision Ball Bearing)**

Model	Wheel Diameter (inches)	Tread Width (inches)	Capacity (lbs)	Overall Height (inches)	Swivel Lead (inches)	Approx. Wt. (lbs)	Base Caster Number+
NX 	4	2	1250	5 5/8	1 11/16	8	18NX04228
	5	2	1250	6 1/2	1 5/8	9	18NX05228
	6	2	1250	7 1/2	1 3/4	10 3/4	18NX06228
	8	2	1250	9 1/2	1 3/4	11	18NX08228