




391

Wheel Diameter Inches (mm)	Tread Width Inches (mm)	Wheel Description	Capacity (Lbs)	Load Height Inches (mm)	Swivel Radius Inches (mm)	Wheel Bearing	Model Number
CENTRAL LOCKING TOTAL LOCK MODELS							
4	1-1/4"/32	35K TPR	220	5-1/2"/139	3-11/16"/92	Precision Ball	391Q 35K 100 RZ
4	1-1/4"/32	32C Rubber on steel	220	5-1/2"/139	3-11/16"/92	Flange Bearing	391Q 32C 100 BZ
5	1-1/4"/32	35K TPR	220	6-7/16"/164	4-7/16"/107	Precision Ball	391Q 35K 125 RZ
5	1-1/4"/32	32C Rubber on steel	220	6-7/16"/164	4-7/16"/107	Flange Bearing	391Q 32C 125 BZ
6	1-1/4"/32	35K TPR	264	7-1/2"/191	4-15/16"/126	Precision Ball	391Q 35K 150 RZ
6	1-1/4"/32	32C Rubber on steel	264	7-1/2"/191	4-15/16"/126	Flange Bearing	391Q 32C 150 BZ
8	1-1/4"/32	35K TPR	264	9-9/16"/243	6-5/16"/161	Precision Ball	391Q 35K 200 RZ
8	1-1/4"/32	32C Rubber on steel	264	9-9/16"/243	6-5/16"/161	Flange Bearing	391Q 32C 200 BZ

CENTRAL LOCKING DIRECTIONAL AND TOTAL LOCK COMBO							
4	1-1/4"/32	35K TPR	220	5-1/2"/139	3-11/16"/92	Precision Ball	391R 35K 100 RZ
4	1-1/4"/32	32C Rubber on steel	220	5-1/2"/139	3-11/16"/92	Flange Bearing	391R 32C 100 BZ
5	1-1/4"/32	35K TPR	220	6-7/16"/164	4-7/16"/107	Precision Ball	391R 35K 125 RZ
5	1-1/4"/32	32C Rubber on steel	220	6-7/16"/164	4-7/16"/107	Flange Bearing	391R 32C 125 BZ
6	1-1/4"/32	35K TPR	264	7-1/2"/191	4-15/16"/126	Precision Ball	391R 35K 150 RZ
6	1-1/4"/32	32C Rubber on steel	264	7-1/2"/191	4-15/16"/126	Flange Bearing	391R 32C 150 BZ
8	1-1/4"/32	35K TPR	264	9-9/16"/243	6-5/16"/161	Precision Ball	391R 35K 200 RZ
8	1-1/4"/32	32C Rubber on steel	264	9-9/16"/243	6-5/16"/161	Flange Bearing	391R 32C 200 BZ

CENTRAL LOCKING FREE SWIVEL MODELS							
4	1-1/4"/32	35K TPR	220	5-1/2"/139	3-11/16"/92	Precision Ball	391A 35K 100 RZ
4	1-1/4"/32	32C Rubber on steel	220	5-1/2"/139	3-11/16"/92	Flange Bearing	391A 32C 100 BZ
5	1-1/4"/32	35K TPR	220	6-7/16"/164	4-7/16"/107	Precision Ball	391A 35K 125 RZ
5	1-1/4"/32	32C Rubber on steel	220	6-7/16"/164	4-7/16"/107	Flange Bearing	391A 32C 125 BZ
6	1-1/4"/32	35K TPR	264	7-1/2"/191	4-15/16"/126	Precision Ball	391A 35K 150 RZ
6	1-1/4"/32	32C Rubber on steel	264	7-1/2"/191	4-15/16"/126	Flange Bearing	391A 32C 150 BZ
8	1-1/4"/32	35K TPR	264	9-9/16"/243	6-5/16"/161	Precision Ball	391A 35K 200 RZ
8	1-1/4"/32	32C Rubber on steel	264	9-9/16"/243	6-5/16"/161	Flange Bearing	391A 32C 200 BZ

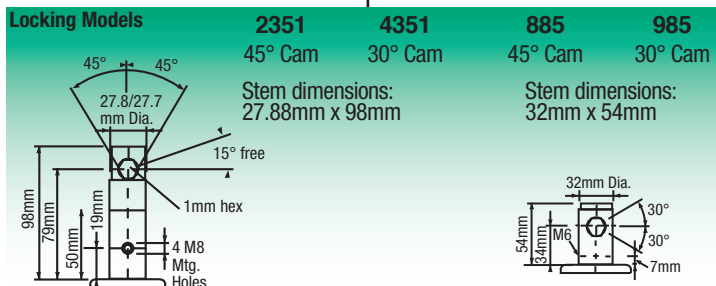

Central locking mechanism includes: Two locking hole options available • Locking hole in line or across direction of travel • Four M8 fixing holes • Snap-on adapter sleeves available for different tube dimensions